

SERIES FRC1300 FIRE RATED HOSE CABINETS

For Use with 1 1/2" Hose Rack Assembly and Portable Fire Extinguisher

CLASSIFIED BY UNDERWRITERS LABORATORIES INC*. for use in the through penetration fire stop systems. The applicable rating information is listed at 2 hours for flame, temperature, and/or hose stream. Fabricated of Galvannealed steel, 20ga. box, with knock out provision in inner box; (penetration of fire protection box, to accommodate piping, and the restoration of fire stop around penetration, shall be completed by installing contractor). 20 ga. tubular steel door with 18 ga. frame and a continuous steel hinge. Left hand hinge standard. All components are powder-coated with an electrostatically-applied, thermally-fused, recoatable white polyester finish. All glass door styles provided with clear tempered safety glass. Wall mounting and size of cabinet as selected by model number.

*UL Classified 7N43

MODEL SELECTION

- ☐ **FRC1302** Recessed
- ☐ **FRC1304** Recessed
- ☐ **FRC1306** Recessed
- ☐ **FRC1312** Trimless
- ☐ **FRC1314** Trimless
- ☐ **FRC1316** Trimless
- ☐ **FRC1332** Semi-Recessed
- ☐ **FRC1334** Semi-Recessed
- ☐ **FRC1336** Semi-Recessed
- ☐ **FRC1342** Semi-Recessed
- ☐ **FRC1344** Semi-Recessed
- ☐ **FRC1346** Semi-Recessed

DOOR STYLES (Select One)

- ☐ -A Full Glass, w/ Tempered Safety Glass
- ☐ -B Break-Glass, w/lock & Break Rite® Handle
- ☐ -D Duo-Panel w/ Tempered Safety Glass
- ☐ -DV Duo-Vertical Panel w/ Tempered Safety Glass
- ☐ -DVL Duo-Vertical Panel w/ Lock, TSG & Break Rite® Handle.
- ☐ -E Tempered Safety Glass (25 sq. in.) w/ Break Rite® Handle
- ☐ -F Flush Solid Metal
- ☐ -FS Flush Solid Metal w/ lock
- ☐ -J Insert Panel
- ☐ (Specify) Optional inserts for glass-style doors
 - ☐ -5 Full Filmed Wire Glass
 - ☐ -6 1/8" Clear Acrylic



MODEL FRC1304-A (Shown)

PRODUCT OPTIONS

DOOR AND FRAME MATERIAL:

- ☐ -AL ALUMINUM: Clear Anodized Finish
Optional Duranodic Finish
 - ☐ Light ☐ Medium ☐ Dark
- ☐ -SS STAINLESS STEEL: 304 w/ #4 Finish
Optional Finish
 - ☐ 304 w/ #6 Dull Stain ☐ 304 w/ #8 Mirror
- ☐ -PB BRASS: Polished Finish
- ☐ -BZ BRONZE: Call for Options

OPTIONAL FINISHES TO DOOR AND FRAME ABOVE:

- ☐ -RED: Powder Coat
- ☐ -CUSTOM COLORS (Call for Options)

CABINET MODIFICATIONS:

- ☐ -HF Horizontal Fold Cabinet
- ☐ -FP Flush Pull Handle
- ☐ -RIGHT Right Hand Hinge

If option not shown contact factory.

**NOTE: DOOR STYLES -A, -D, -DV, -F, & -J PROVIDED w/ LEVER HANDLE/CAM LATCH

**NOTE: ALL GLASS DOOR STYLES PROVIDED WITH CLEAR TEMPERED SAFETY GLASS IN COMPLIANCE WITH ANSI Z97-1-1984

Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Potter Roemer - Fire Pro assumes no responsibility for use of void or superseded data. © Copyright Potter Roemer - Fire Pro, Member of Morris Group International™ Please visit potterroemer.com for most current specifications.

FRC1300 SERIES

Date: 07/17/24

MEMBERSHIP



FIRE EQUIPMENT
MANUFACTURERS'
ASSOCIATION



CASPE
American Society of
Plumbing Engineers

ONFSA
NATIONAL FIRE SPRINKLER ASSOCIATION, INC.



POTTER ROEMER

Headquarters:
P.O. Box 3527
City of Industry, CA
91744 U.S.A.
Los Angeles Area
800-366-3473
626-855-4890

Also in:
New York (800) 526-4592
Chicago (800) 547-3473
Atlanta (800) 762-0542
Miami (833) 744-3473
Dallas (866) 644-3473


www.potterroemer.com

SERIES FRC1300 FIRE RATED HOSE CABINETS

MODEL DIMENSIONS

Model No.	Wall Mounting	Max. Capacity		Inside Box Dimensions			Overall Frame		Wall Opening Required			Trim	Inlet Location				
		Poly flex ft.	Super flex ft.	K	L	M	N	O	W I D T H	H E I G H T	D E P T H	T	W	X	Y	Z	
FRC1302	Recessed	75	50	30	30	8	33-3/4	33-3/4	32-1/4	32	9-1/8	5/8	4	4	2-3/4	4	
FRC1304	Recessed	100	75	30	36	8	33-3/4	39-3/4	32-1/4	38	9-1/8	5/8	4	4	2-3/4	4	
FRC1306	Recessed	100	100	30	40	8	33-3/4	43-3/4	32-1/4	42	9-1/8	5/8	4	4	2-3/4	4	
FRC1312	Trimless	75	50	30	30	8	33	33	32-1/4	32	10-1/2	-	4	4	2-3/4	4	
FRC1314	Trimless	100	75	30	36	8	33	39	32-1/4	38	10-1/2	-	4	4	2-3/4	4	
FRC1316	Trimless	100	100	30	40	8	33	43	32-1/4	42	10-1/2	-	4	4	2-3/4	4	
FRC1332	Semi-Recessed	75	50	30	30	8	33-1/2	33-1/2	32-1/4	32	7	2-3/4	4	4	2-3/4	4	
FRC1334	Semi-Recessed	100	75	30	36	8	33-1/2	39-1/2	32-1/4	38	7	2-3/4	4	4	2-3/4	4	
FRC1336	Semi-Recessed	100	100	30	40	8	33-1/2	43-1/2	32-1/4	42	7	2-3/4	4	4	2-3/4	4	
FRC1342	Semi-Recessed	75	50	30	30	8	33-1/2	33-1/2	32-1/4	32	5	4-3/4	4	4	2-3/4	4	
FRC1344	Semi-Recessed	100	75	30	36	8	33-1/2	39-1/2	32-1/4	38	5	4-3/4	4	4	2-3/4	4	
FRC1346	Semi-Recessed	100	100	30	40	8	33-1/2	43-1/2	32-1/4	42	5	4-3/4	4	4	2-3/4	4	

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED

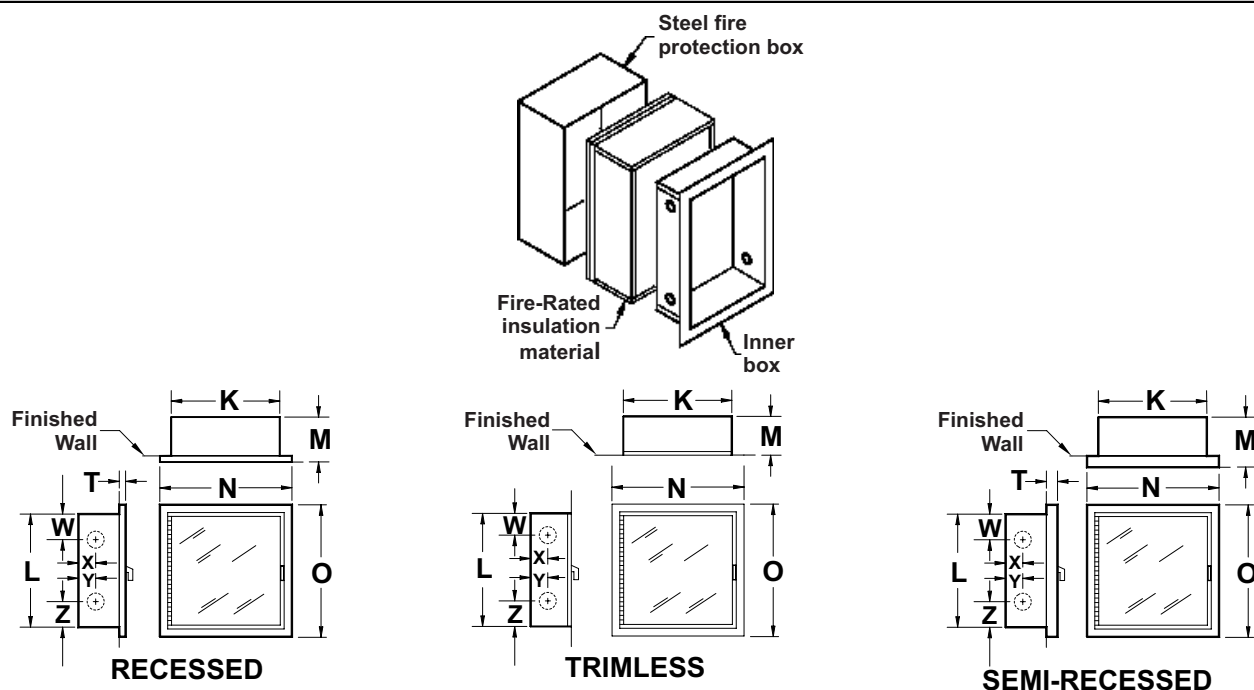

Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Potter Roemer - Fire Pro assumes no responsibility for use of void or superseded data. © Copyright Potter Roemer - Fire Pro, Member of Morris Group International™ Please visit potterroemer.com for most current specifications.

FRC1300 SERIES

MEMBERSHIP



FIRE EQUIPMENT MANUFACTURERS' ASSOCIATION



CASPE American Society of Plumbing Engineers

ONFSA NATIONAL FIRE SPRINKLER ASSOCIATION, INC.



POTTER ROEMER

Headquarters:
P.O. Box 3527
City of Industry, CA
91744 U.S.A.
Los Angeles Area
800-366-3473
626-855-4890

Also in:
New York (800) 526-4592
Chicago (800) 547-3473
Atlanta (800) 762-0542
Miami (833) 744-3473
Dallas (866) 644-3473

www.potterroemer.com