

## SERIES FRC1000 FIRE RATED HOSE CABINETS

### For Use with Class II 1 1/2" Hose Rack Assembly

CLASSIFIED BY UNDERWRITERS LABORATORIES INC\*. for use in the through penetration fire stop systems. The applicable rating information is listed at 2 hours for flame, temperature, and/or hose stream. Fabricated of Galvannealed steel, 20ga. box, with knock out provision in inner box; (penetration of fire protection box, to accommodate piping, and the restoration of fire stop around penetration, shall be completed by installing contractor). 20 ga. tubular steel door with 18 ga. frame and a continuous steel hinge. Left hand hinge standard. All components are powder-coated with an electrostatically-applied, thermally-fused, recoatable white polyester finish. All glass door styles provided with clear tempered safety glass. Wall mounting and size of cabinet as selected by model number.

\*UL Classified 7N43

### MODEL SELECTION

- ☐ FRC1002 Recessed
- ☐ FRC1004 Recessed
- ☐ FRC1006 Recessed
- ☐ FRC1012 Trimless
- ☐ FRC1014 Trimless
- ☐ FRC1016 Trimless
- ☐ FRC1022 Semi-Recessed
- ☐ FRC1024 Semi-Recessed
- ☐ FRC1026 Semi-Recessed

### DOOR STYLES (Select One)

- ☐ -A Full Glass, w/ Tempered Safety Glass
- ☐ -B Break-Glass, w/lock & Break Rite® Handle
- ☐ -D Duo-Panel w/ Tempered Safety Glass
- ☐ -DV Duo-Vertical Panel w/ Tempered Safety Glass
- ☐ -DVL Duo-Vertical Panel w/ Lock, TSG & Break Rite® Handle.
- ☐ -E Tempered Safety Glass (25 sq. in.) w/ Break Rite® Handle
- ☐ -F Flush Solid Metal
- ☐ -FS Flush Solid Metal w/ lock
- ☐ -J Insert Panel
- ☐ (Specify) Optional inserts for glass-style doors
  - ☐ -5 Full Filmed Wire Glass
  - ☐ -6 1/8" Clear Acrylic



MODEL FRC1004-A (Shown)

### PRODUCT OPTIONS

#### DOOR AND FRAME MATERIAL:

- ☐ -AL ALUMINUM: Clear Anodized Finish  
Optional Duranodic Finish
  - ☐ Light ☐ Medium ☐ Dark
- ☐ -SS STAINLESS STEEL: 304 w/ #4 Finish  
Optional Finish
  - ☐ 304 w/ #6 Dull Stain ☐ 304 w/ #8 Mirror
- ☐ -PB BRASS: Polished Finish
- ☐ -BZ BRONZE: Call for Options

#### OPTIONAL FINISHES TO DOOR AND FRAME ABOVE:

- ☐ -RED: Powder Coat
- ☐ -CUSTOM COLORS (Call for Options)

#### CABINET MODIFICATIONS:

- ☐ -HF Horizontal Fold Cabinet
- ☐ -FP Flush Pull Handle
- ☐ -RIGHT Right Hand Hinge

If option not shown contact factory.

\*\*NOTE: DOOR STYLES -A, -D, -DV, -F, & -J PROVIDED w/ LEVER HANDLE/CAM LATCH

\*\*NOTE: ALL GLASS DOOR STYLES PROVIDED WITH CLEAR TEMPERED SAFETY GLASS IN COMPLIANCE WITH ANSI Z97-1-1984

Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Potter Roemer - Fire Pro assumes no responsibility for use of void or superseded data. © Copyright Potter Roemer - Fire Pro, Member of Morris Group International™ Please visit [potterroemer.com](http://potterroemer.com) for most current specifications.

**FRC1000 SERIES**

Date: 07/17/24

**MEMBERSHIP**



FIRE EQUIPMENT  
MANUFACTURERS'  
ASSOCIATION



**ONFSA**  
NATIONAL FIRE SPRINKLER ASSOCIATION, INC.



### POTTER ROEMER

Headquarters:  
P.O. Box 3527  
City of Industry, CA  
91744 U.S.A.  
Los Angeles Area  
800-366-3473  
626-855-4890

Also in:  
New York (800) 526-4592  
Chicago (800) 547-3473  
Atlanta (800) 762-0542  
Miami (833) 744-3473  
Dallas (866) 644-3473



[www.potterroemer.com](http://www.potterroemer.com)

# SERIES FRC1000 FIRE RATED HOSE CABINETS


## MODEL DIMENSIONS

Model No.	Wall Mounting	Max. Capacity		Inside Box Dimensions			Overall Frame		Wall Opening Required			Trim	Inlet Location	
		Poly flex ft.	Super flex ft.	K	L	M	N	O	W I D T H	H E I G H T	D E P T H	T	W	X
FRC1002	Recessed	75	50	24	30	5-1/2	27-3/4	33-3/4	26-1/4	32	6-5/8	5/8	4	2-3/4
FRC1004	Recessed	100	75	24	36	5-1/2	27-3/4	39-3/4	26-1/4	38	6-5/8	5/8	4	2-3/4
FRC1006	Recessed	100	100	24	40	5-1/2	27-3/4	43-3/4	26-1/4	42	6-5/8	5/8	4	2-3/4
FRC1012	Trimless	75	50	24	30	5-1/2	27	33	26-1/4	32	8	-	4	2-3/4
FRC1014	Trimless	100	75	24	36	5-1/2	27	39	26-1/4	38	8	-	4	2-3/4
FRC1016	Trimless	100	100	24	40	5-1/2	27	43	26-1/4	42	8	-	4	2-3/4
FRC1022	Semi-Recessed	75	50	24	30	5-1/2	27-1/2	33-1/2	26-1/4	32	5-1/4	2	4	2-3/4
FRC1024	Semi-Recessed	100	75	24	36	5-1/2	27-1/2	39-1/2	26-1/4	38	5-1/4	2	4	2-3/4
FRC1026	Semi-Recessed	100	100	24	40	5-1/2	27-1/2	43-1/2	26-1/4	42	5-1/4	2	4	2-3/4


ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED

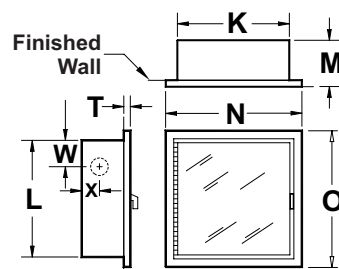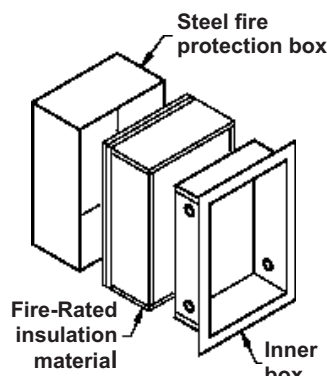

RECESSED

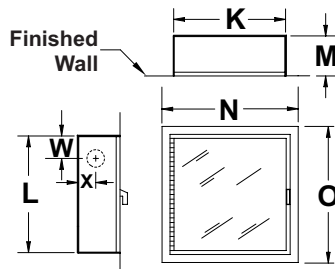

TRIMLESS

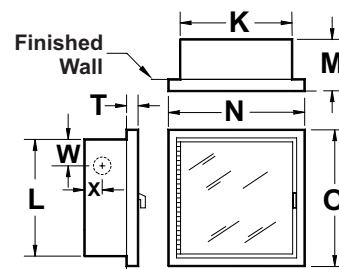

SEMI-RECESSED

Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Potter Roemer - Fire Pro assumes no responsibility for use of void or superseded data. © Copyright Potter Roemer - Fire Pro, Member of Morris Group International™ Please visit [potterroemer.com](http://potterroemer.com) for most current specifications.

### FRC1000 SERIES

MEMBERSHIP



FIRE EQUIPMENT MANUFACTURERS' ASSOCIATION



### POTTER ROEMER

Headquarters:  
P.O. Box 3527  
City of Industry, CA  
91744 U.S.A.  
Los Angeles Area  
800-366-3473  
626-855-4890

Also in:  
New York (800) 526-4592  
Chicago (800) 547-3473  
Atlanta (800) 762-0542  
Miami (833) 744-3473  
Dallas (866) 644-3473

[www.potterroemer.com](http://www.potterroemer.com)