

SERIES FRC1600 FIRE RATED HOSE CABINETS

For Use with 1 1/2" Fire Hose Rack Assembly

CLASSIFIED BY UNDERWRITERS LABORATORIES INC*. for use in the through penetration fire stop systems. The applicable rating information is listed at 2 hours for flame, temperature, and/or hose stream. Fabricated of Galvannealed steel, 20ga. box, with knock out provision in inner box; (penetration of fire protection box, to accommodate piping, and the restoration of fire stop around penetration, shall be completed by installing contractor). 20 ga. tubular steel door with 18 ga. frame and a continuous steel hinge. Left hand hinge standard. All components are powdercoated with an electrostatically-applied, thermallyfused, recoatable white polyester finish. All glass door styles provided with clear tempered safety glass. Wall mounting and size of cabinet as selected by model number.

*UL Classified 7N43

MODEL SELECTION | FRC1602 Recessed | FRC1604 Recessed | FRC1606 Recessed | FRC1612 Trimless | FRC1614 Trimless | FRC1616 Trimless | DOOR STYLES (Select One) | -BA Full Bubble with Glass | -BB Break Bubble with Glass | -BF Full Bubble with Flush Solid Metal



MODEL FRC1604-BA (Shown)

PRODUCT OPTIONS

DOOR AND FRAME MATERIAL:								
🔲 -AL	ALUMINUM: Clear Anodized Finish							
	Optional Duranodic Finish							
	☐ Light ☐ Medium ☐ Dark							
🔲 -SS	STAINLESS STEEL: 304 w/ #4 Finish							
	Optional Finish							
	☐ 304 w/ #6 Dull Stain ☐ 304 w/ #8 Mirror							
🔲 -PB	BRASS: Polished Finish							
🔲 -BZ	BRONZE: Call for Options							
OPTIONAL FINISHES TO DOOR AND FRAME ABOVE:								
☐ -RED: Powder Coat								
☐ -CUSTOM COLORS (Call for Options)								
CABINET MODIFICATIONS:								
☐ -RIGHT Right Hand Hinge								
_								
If option not shown contact factory.								
**NOTE: DOOR STYLES -BA & -BF PROVIDED w/ LEVER HANDLE/CAM LATCH								

GLASS IN COMPLIANCE WITH ANSI Z97-1-1984

**NOTE: DOOR STYLE -BA PROVIDED WITH CLEAR TEMPERED SAFETY

Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Potter Roemer-Fire Pro assumes no responsibility for use of void or superceded data. © Copyright Potter Roemer-Fire Pro, Member of Morris Group International TM Please visit potterroemer.com for most current specifications.













POTTER ROEMER

Headquarters: P.O. Box 3527 City of Industry, CA 91744 U.S.A. Los Angeles Area 800-366-3473 626-855-4890 Also in: New York (800) 526-4592 Chicago (800) 547-3473 Atlanta (800) 762-0542 Miami (833) 744-3473 Dallas (866) 644-3473

www.potterroemer.com




SERIES FRC1600 FIRE RATED HOSE CABINETS

MODEL DIMENSIONS

Model No.	Wall Mounting	Max. Capacity		Inside Box Dimensions			Overall Frame		Wall Opening Required			P R O	Trim	Inlet Location	
		Poly flex ft.	Super flex ft.	к	L	М	N	0	W I D T H	H E G H T	ОЕР⊤Н	J E C T I O N S	Т	w	х
FRC1602	Recessed	75	50	30	30	4-1/4	33-3/4	39-3/4	32-1/4	32	5-3/8	3	5/8	4	2-1/2
FRC1604	Recessed	100	75	30	36	4-1/4	33-3/4	39-3/4	32-1/4	38	5-3/8	3	5/8	4	2-1/2
FRC1606	Recessed	100	100	30	40	4-1/4	33-3/4	43-3/4	32-1/4	42	5-3/8	3	5/8	4	2-1/2
FRC1612	Trimless	75	50	30	30	4-1/4	33	33	32-1/4	32	6-3/4	3	-	4	2-1/2
FRC1614	Trimless	100	75	30	36	4-1/4	33	39	32-1/4	38	6-3/4	3	-	4	2-1/2
FRC1616	Trimless	100	100	30	40	4-1/4	33	43	32-1/4	42	6-3/4	3	-	4	2-1/2

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED

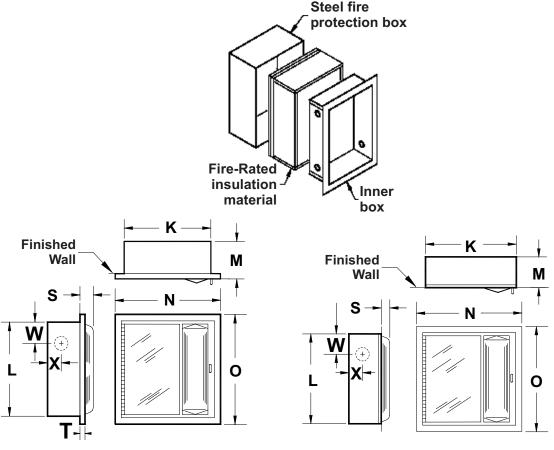

RECESSED

TRIMLESS

Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Potter Roemer-Fire Pro assumes no responsibility for use of void or superceded data. © Copyright Potter Roemer- Fire Pro, Member of Morris Group International ™ Please visit potterroemer.com for most current specifications.





NFPA







ONFSA

Headquarters: P.O. Box 3527 City of Industry, CA 91744 U.S.A. Los Angeles Area 800-366-3473 626-855-4890

POTTER ROEMER Also in:

New York (800) 526-4592 Chicago (800) 547-3473 Atlanta (800) 762-0542 Miami (833) 744-3473 Dallas (866) 644-3473

www.potterroemer.com