

SERIES 4010-FA3 & 4015-FA3 ADJUSTABLE REG-U-MATIC® PRESSURE REDUCING HOSE VALVES

FEATURES

- Reduces pressure under flow and no flow conditions
- Static pressure rated up to 340 PSI (23.4 BARS)
- 180° view of open/closed indicator
- Six different spring settings
- Built in automatic check valve
- UL and ULC listed, complies with NFPA-14

MODEL SELECTION

☐ 4010-FS3 1-1/2" Angle

Cast Brass, Female N.P.T. inlet and Female N.P.T. outlet

☐ 4015-FS3 1-1/2" Angle

Cast Brass, Female N.P.T. inlet and Male hose thread outlet

PRODUCT OPTIONS

FINISHES:

- ☐ -C Rough Chrome Plated


THREADS:

- ☐ N.S.T.
- ☐ OTHER _____




MODEL 4010-FA3 (Shown)

Model No.	A Open		A Close		B		C		D		Weight	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs	kg
4010-FA3	12 1/4	311	11 13/16	300	3 3/4	95	1 7/8	48	2	53	15	7
4015-FA3	12 1/4	311	11 13/16	300	3 3/4	95	1 7/8	48	2 7/8	73	15	7

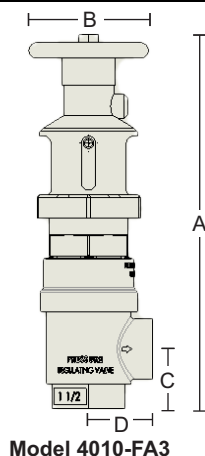

Model 4010-FA3

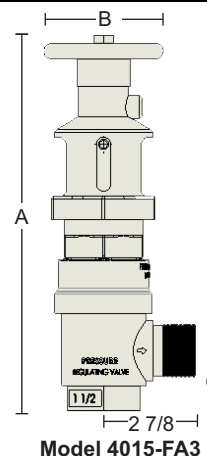

Model 4015-FA3

Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Potter Roemer - Fire Pro assumes no responsibility for use of void or superseded data. © Copyright Potter Roemer - Fire Pro, Member of Morris Group International™ Please visit potterroemer.com for most current specifications.

4010-FA3&4015-FA3 SERIES Date: 07/02/24

MEMBERSHIP



FIRE EQUIPMENT
MANUFACTURERS'
ASSOCIATION



ONFSA
NATIONAL FIRE SPRINKLER ASSOCIATION, INC.



POTTER ROEMER

Headquarters:
P.O. Box 3527
City of Industry, CA
91744 U.S.A.
Los Angeles Area
800-366-3473
626-855-4890

Also in:
New York (800) 526-4592
Chicago (800) 547-3473
Atlanta (800) 762-0542
Miami (833) 744-3473
Dallas (866) 644-3473

www.potterroemer.com

FIELD SETTING INSTRUCTIONS MODELS 4010 -FS3 AND 4014 -FS3

1. Remove the Tamper -resistant security screws from the clear cover by using a #833 Security tool provided with the valve. (If Supervisory Switch is installed, you may need to tilt this switch for access.) See Figure 1.

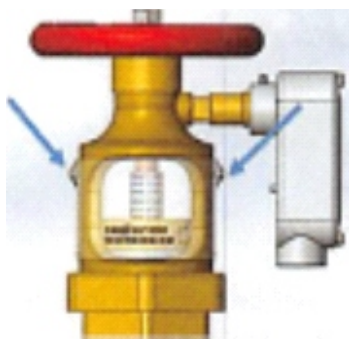


Figure 1: Tamper Resistant Security Screws

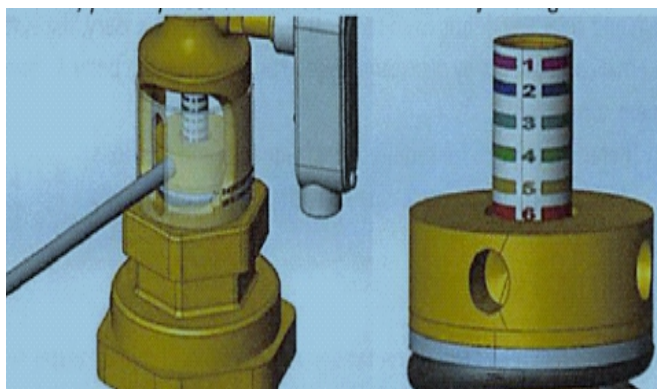


Figure 2: Rotating Spring Controller for Different Valve Settings

2. Rotate the clear cover as required: Insert adjustable tool (provided with the valve) through the slot in the clear cover and into the hole in the Adjustable Spring Controller. See Figure 2.
3. Rotate the Spring Controller until the top of the Spring Controller is aligned with the desired mark on the indication Label (See Figure 2). Turn Clock -Wise to go from Valve Setting number 1 through 6.
4. When rotation limit is reached during adjustment remove the tool from the Spring Controller hole and re -insert the tool into the next available hole.
5. When the proper adjustment is obtained, verify the outlet pressure is correct with pressure gauges both upstream and downstream of the valve (during both flow and no -flow pressure testing). Make adjustments as required (Counterclockwise is possible).
6. Once the valve is properly adjusted, replace the tamper -resistance screw t hat was removed in step 1.

***** #833 Security Tool and Adjustment Tool should be stored in a special location for Fire Department use .**

Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Potter Roemer- Fire Pro assumes no responsibility for use of void or superceded data. © Copyright Potter Roemer- Fire Pro, Member of Morris Group International™ Please visit potterroemer.com for most current specifications.

4010-FA3&4015-FA3 SERIES

MEMBERSHIP



**FIRE EQUIPMENT
MANUFACTURERS'
ASSOCIATION**



CASPE
American Society of
Plumbing Engineers

ONFSA
NATIONAL FIRE SPRINKLER ASSOCIATION, INC.



POTTER ROEMER


Headquarters:
P.O. Box 3527
City of Industry, CA
91744 U.S.A.
Los Angeles Area
800-366-3473
626-855-4890

Also in:
New York (800) 526-4592
Chicago (800) 547-3473
Atlanta (800) 762-0542
Miami (833) 744-3473
Dallas (866) 644-3473


www.potterroemer.com

SERIES 4010-FA3 & 4015-FA3 ADJUSTABLE REG-U-MATIC® PRESSURE REDUCING HOSE VALVES


50 GPM

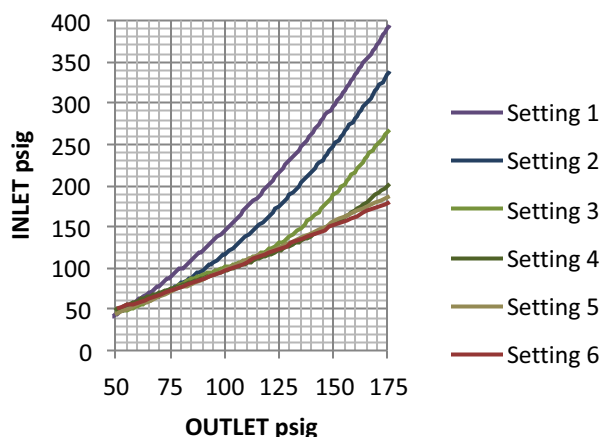


100 GPM

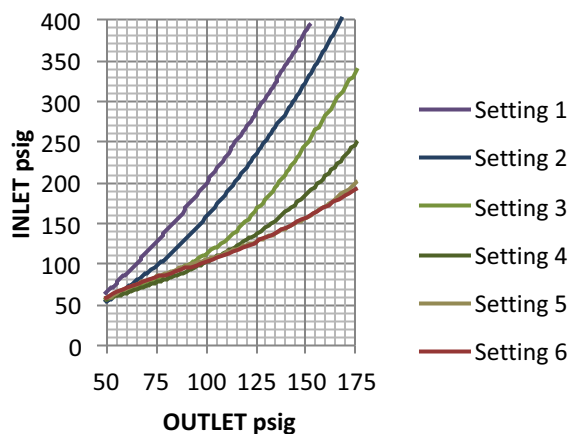

150 GPM

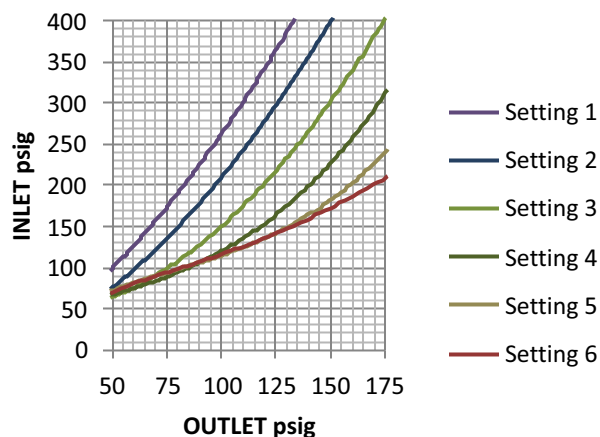

200 GPM

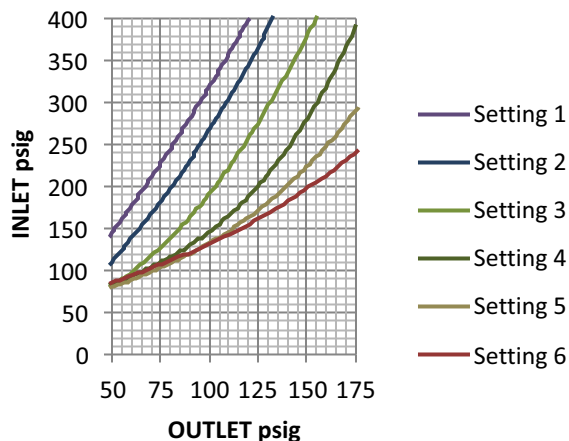

Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Potter Roemer - Fire Pro assumes no responsibility for use of void or superseded data. © Copyright Potter Roemer - Fire Pro, Member of Morris Group International™ Please visit potterroemer.com for most current specifications.

4010-FA3&4015-FA3 SERIES

MEMBERSHIP



FIRE EQUIPMENT
MANUFACTURERS'
ASSOCIATION



CASPE
American Society of
Plumbing Engineers

NFSA
NATIONAL FIRE SPRINKLER ASSOCIATION, INC.



POTTER ROEMER

Headquarters:
P.O. Box 3527
City of Industry, CA
91744 U.S.A.
Los Angeles Area
800-366-3473
626-855-4890

Also in:
New York (800) 526-4592
Chicago (800) 547-3473
Atlanta (800) 762-0542
Miami (833) 744-3473
Dallas (866) 644-3473

www.potterroemer.com