

**DS-K2220X
Pro Elevator Controller**

- Comes with mainboard and chassis, the chassis includes a power supply, and does not support battery access
- Storage with 50,000 users, 100,000 Cards, 300,000 events and 30,000 fingerprints. Up to 128 floors' permissions
- Uplink communication: TCP/IP and RS-485
- Accessible card reader: 2 Wiegand readers or 2 RS-485 readers
- Input interface: emergency button×1, fire alarm button×1, maintenance button×1, case input×2


▪ Specification

System	
Operating system	Linux
Processor	32 bit
Network	
Communication protocol	TCP/IP
Interface	
Alarm input	1 Panic Button; 1 Fire Alarm Button; 1 Maintenance Button
Alarm output	2 Relay Outputs
RS-485	3
Wiegand	2
Capacity	
User capacity	50,000
Fingerprint capacity	30,000
Card capacity	100,000
Event capacity	300,000
General	
Indicator	<ol style="list-style-type: none"> 1. Power On: Solid Green 2. Network Armed: Flashing Green, Network Not Armed: Solid Red 3. Serial Port Not Communicating: Light Off, Serial Port Communicating: Solid Green 4. Relay NC: Light Off, Relay NO: Solid Green 5. Network Disconnected: Light Off, Network Cable Connected: Solid Green, Flashing Green
Power supply	100 VAC to 240 VAC
Working temperature	-10 °C to 55 °C (14 °F to 131 ° F)
Working humidity	0% to 90% (No Condensation)
Dimensions	235 mm × 280 mm × 87.8 mm (9.25" ×11.02" × 3.46")
Installation	DIN Rail installation

▪ Available Model

DS-K2220X

▪ Dimension

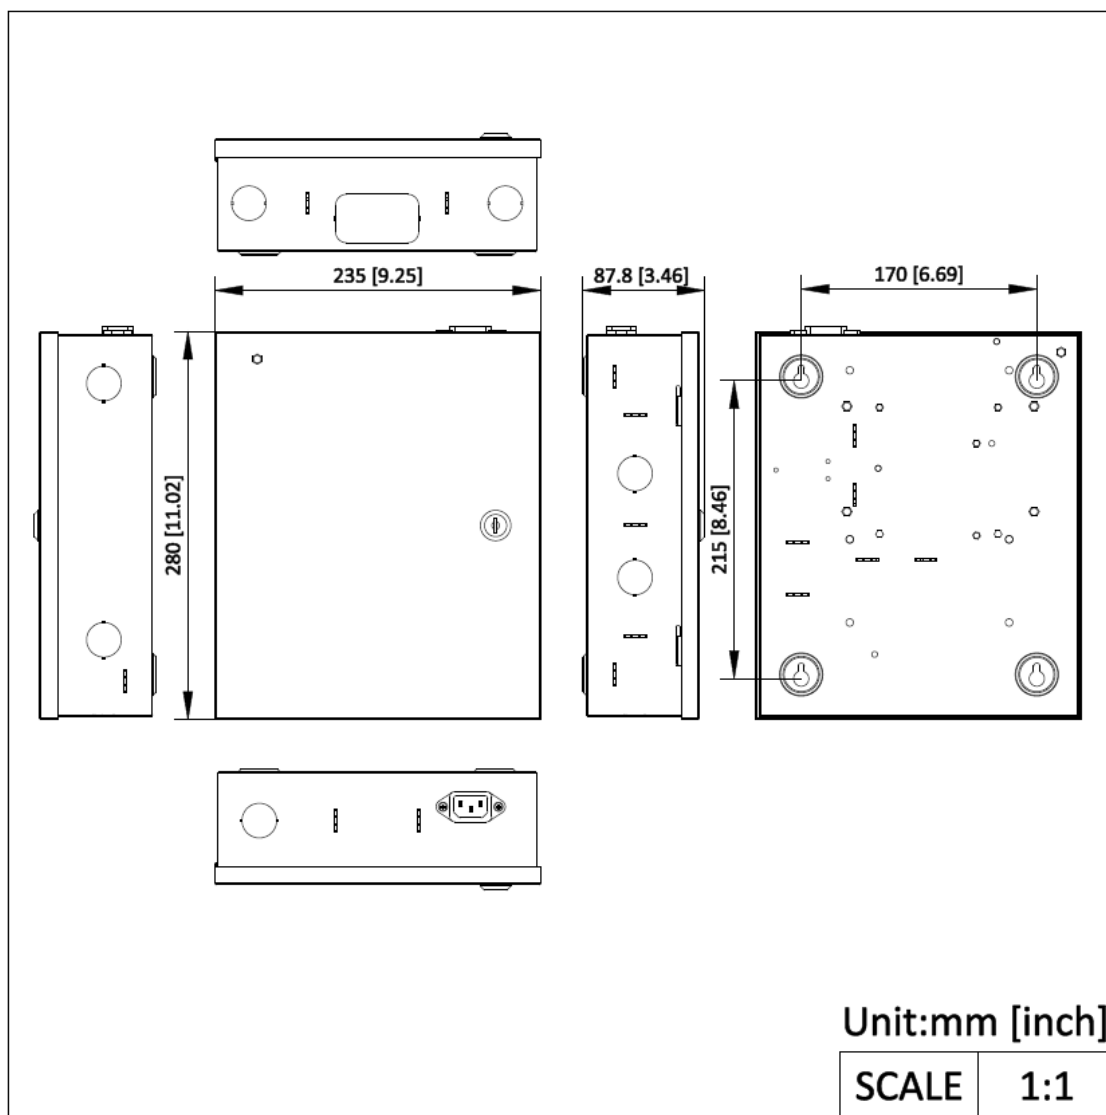

- Accessory
- Optional

DS-K2M0016A
Elevator
Sub-Controller



See Far, Go Further



www.hikvision.com
support@hikvision.com

