



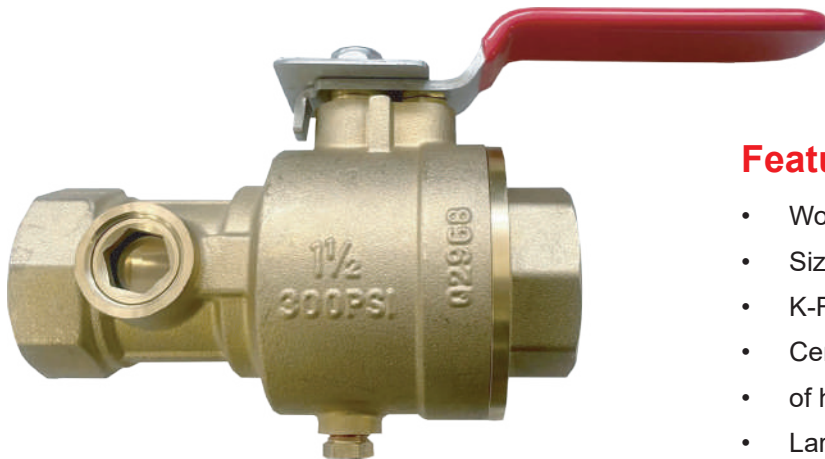

Features

- Working Pressure: 300 PSI
- Size: 1", 1-1/4", 1-1/2", 2"
- K-Factor: 5.6
- Certificated Size: Positive positioning of handle for OFF, TEST, or DRAIN.
- Large, integral sight glass on both sides.

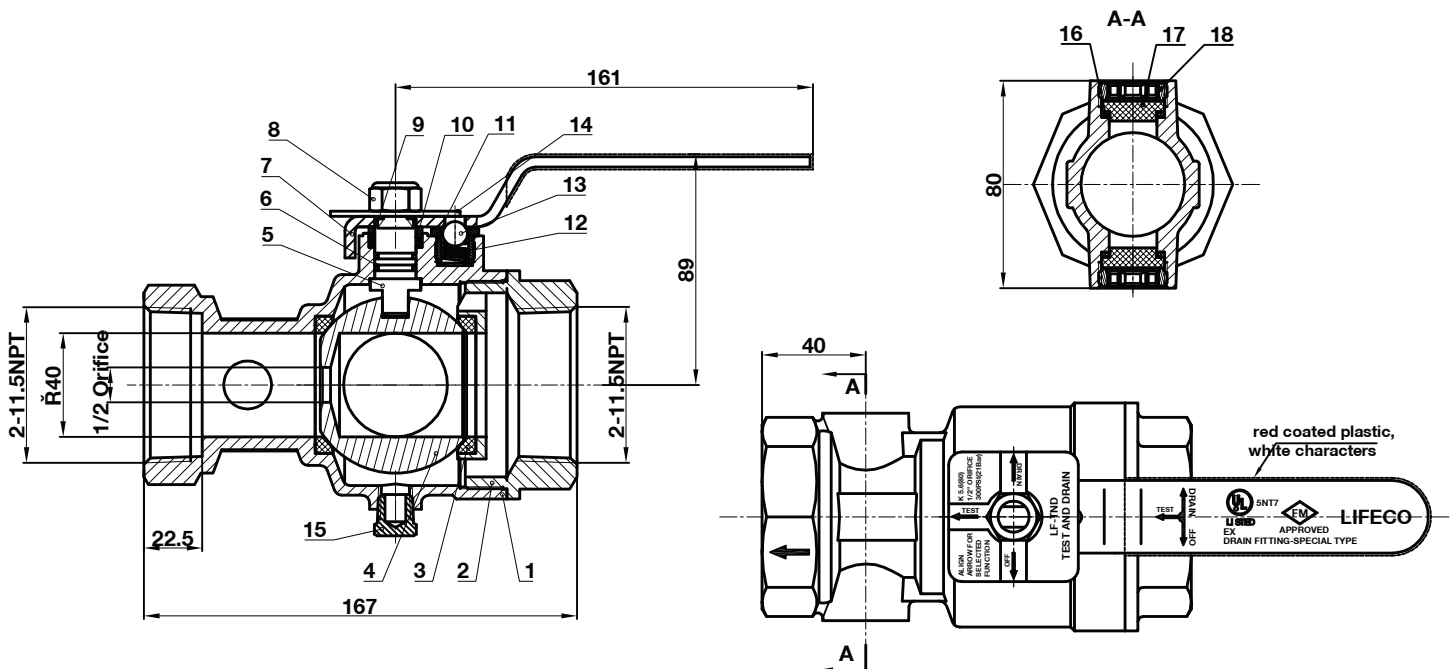

Dimension Table

A/B	Orifice	Port	C	D(ref.)	E	H
NPT 1"	1/2(0.512)	1.024	5	2.76	5.16	1.65
NPT 1-1/4"	1/2(0.528)	1.024	5	2.76	5.16	1.65
NPT 1-1/2"	1/2(0.524)	1.575	6.57	3.5	6.34	2.28
NPT 2"	1/2(0.524)	1.575	6.57	3.5	6.34	2.28

Material Description

Item	Name	Material	Item	Name	Material
1.	Body	C37700	2.	Cap	C37700
3.	Seal	PTFE	4.	Ball	C37700
5.	Stem	C37700	6.	O-Ring	NBR
7.	Lever	Steel	8.	Nut	Steel
9.	Gland Packing	PTFE	10.	Gland Ring	C37700
11.	Gland Nut	C37700	12.	Spring	304
13.	Steel Ball	304	14.	Indicator Plate	Steel
15.	Plug	C37700	16.	Washer	NBR
17.	Sight Glass	Lexan	18.	Retaining Ring	C37700