


رؤية
2030
المملكة العربية السعودية
KINGDOM OF SAUDI ARABIA



Fire Pump Systems

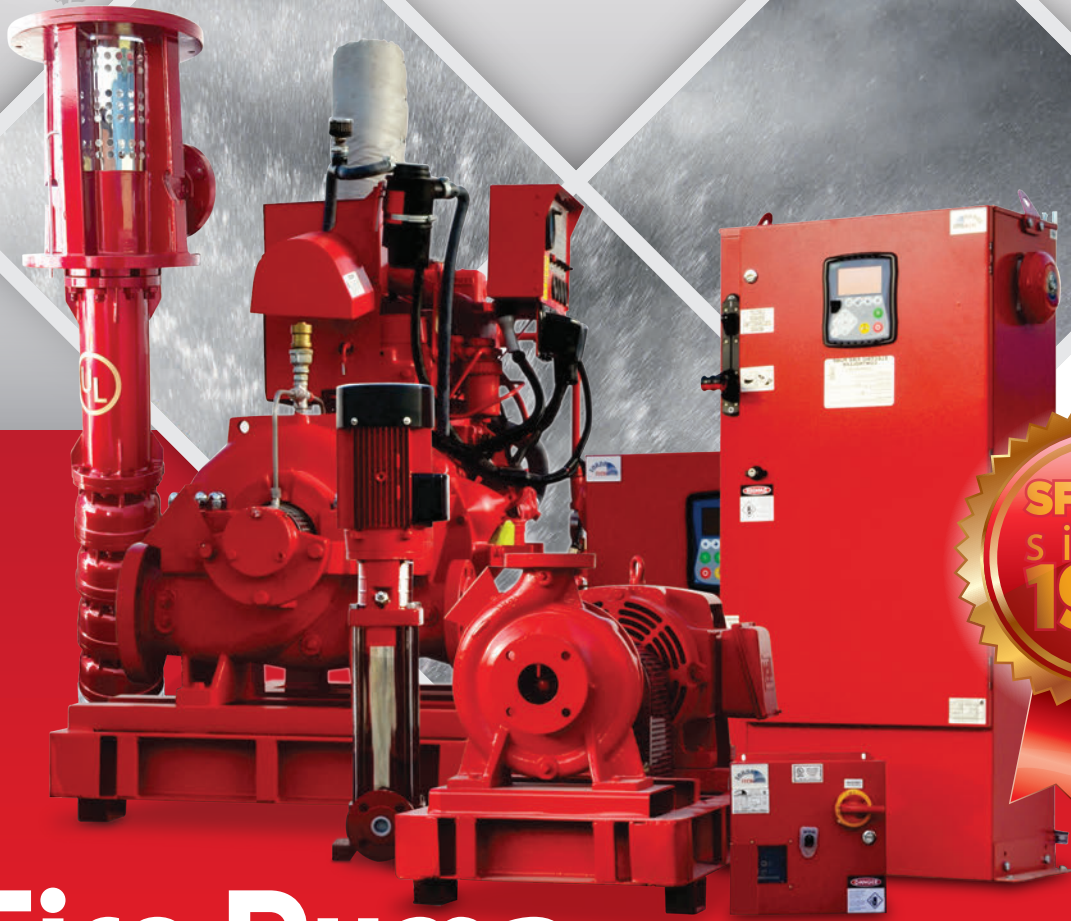

Foam Systems | Deluge Systems | Hydrant Systems
Sprinkler Systems | Hose Reel Systems | Hose Rack System

About us



SFFECO is an ISO9001 certified manufacturing company by BRE Global, is a market leader and specialize in manufacturing of fire-fighting equipment in the world. SFFECO has a long standing established reputation for pioneering innovation ever since its foundation in 1983.

SFFECO has its own state-of-the-art manufacturing plants in Riyadh and Dubai producing end-to-end range of products for the fire fighting industry matching international standards in quality.

SFFECO with its innovative approach provides the entire gamut of products that caters to the needs of the Fire Protection and Fire Fighting industry. This makes SFFECO a one-stop-shop for customers, fulfilling their end-to-end needs in products, solutions and services for the industry.

SFFECO continually expands upon its knowledge and services to keep its clients updated with the latest Fire Fighting Technology in the world. The product range manufactured by SFFECO confirms and holds approval to international standards.

SFFECO Reputation for Quality & Reliability has made its trusted name through out G.C.C & other Countries Worldwide for its Products. SFFECO is not only rich in History & Quality, but on continuous improvement, & development of product features.

SFFECO is a member of National Fire Protection Association (NFPA), British Standards Institution (BSI), Fire Protection Association (FPA), as well as Approved Vendor to Many Governmental, & Semi - Governmental Sectors in G.C.C.

SFFECO Vision to develop with Wisdom & Prosper in Harmony, and continue to be the leader in the Fire Protection industry providing excellent service & superior products for many years to come.



In line with our policy of continuous product improvement, SFFECO reserves the right to modify specifications without prior notice.

SFFECO Fire Pump System Technology



Being Local Specialist Manufacture gives SFFECO the Opportunity and Privilege to Develop an Innovative Pump Assembly Units, and Tailor Pump Packages to clients' specific needs, Moreover SFFECO has assured supplying Pump units comply with Local Authority Requirements, as well as NFPA - 20 Selection and Operation Procedures.

Each pump undergoes required inspection, tests and production control during the assembly process and records are logged for the same, before being delivered to our customers.

SFFECO has established a fully equipped state of the art, UL complaint pump testing facility with advance testing and calibration devices that enables us to accurately advance testing and calibration devices that enable us to accurately inspect and test the operation of each centrifugal stationery fire pump to the required level of compliance standard. Each pump produced, undergoes performance testing as operation test, hydrostatic test, impeller balancing, etc.

SFFECO Fire Pumps are the right Choice for most of the Fire Fighting Applications like:

Fire Hose Cabinet Systems, Automatic Sprinkler Systems, Deluge Systems, Fire Hydrant Systems, Foam Systems, etc.



In line with our policy of continuous product improvement, SFFECO reserves the right to modify specifications without prior notice.


CENTRIFUGAL FIRE PUMPS

END SUCTION (50/60 HZ)



General Features

- ❖ Top Centerline Discharge
- ❖ Foot Supported Casing
- ❖ Back Pullout Design
- ❖ Self- Venting Design
- ❖ Efficiently Designed Impeller
- ❖ Frame-Mounted Design
- ❖ Small Footprint Ideal for Retrofit
- ❖ Dynamically Balanced Impeller
- ❖ Heavy Duty with Heavy Wall Thickness
- ❖ 100% Hydrostatic & Performance Tested
- ❖ Back Pump out Vanes

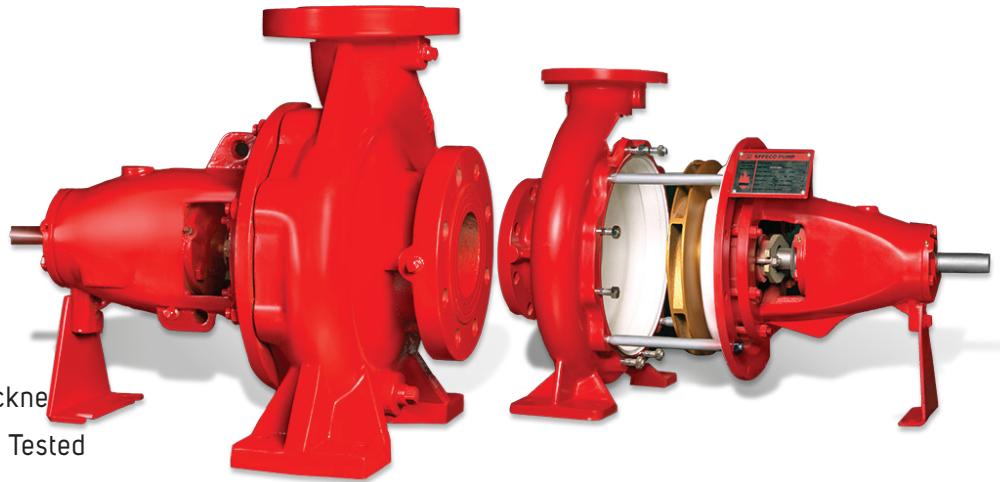

Casing	Cast Iron / Ductile Iron
Impeller	Bronze / Duplex (upon request)
Shaft	Alloy Steel / Stainless Steel / Duplex (upon request)
Capacity	50GPM to 1000 GPM
Pressure	65 to 234 PSI
Max. Working Pressure	180 to 315 PSI
Speed	2900, 3000, 3500 and 3600 RPM

Model Dsg.	Rated Capacity (GPM)	Flange Size (SucXDis) (in)	UL Listed Rated Net Pressure Range (PSI)	Approx Speed (RPM)	Max Working Pressure (PSI)
SFP - 50- 20 EM - 2G	50	2 ½ X 2	74 - 93	2900	180
SFP - 50- 20 EM - 2G		2 ½ X 2	79 - 99	3000	180
SFP 50- 20 EM		2 x 1 ¼	68 - 87	2900	230
SFP 50- 20 EH		2 x 1 ¼	101 - 129	3500	230
SFP 50- 26 EM		2 x 1 ¼	115 - 140	2900	230
SFP 50- 26 EH		2 x 1 ¼	163 - 206	3500	230
SFP 50- 20 EH A		2 ½ x 2	106 - 129	3500	230
SFP 50- 20 EH B		3 x 2 ½	108 - 121	3500	230
SFP 50- 26 EM A		2 ½ x 1 ½	114 - 136	2900	230
SFP 50- 42 EH		2 ½ x 1 ½	122 - 146	3000	230
SFP 50- 40 EH		2 ½ x 1 ½	166 - 198	3500	230
SFP - 100- 20 EM - 2G	100	2 ½ X 2	72 - 92	2900	180
SFP - 100- 20 EM - 2G		2 ½ X 2	77 - 98	3000	180
SFP 100- 20 EH		2 x 1 ¼	119	3500	230
SFP 100- 26 EH		2 x 1 ¼	159 - 195	3500	230
SFP 100- 50 EH		2 ½ x 2	104 - 128	3500	230
SFP 100- 26 EM		2 ½ x 1 ½	109 - 134	2900	230
SFP 100- 42 EH		2 ½ x 1 ½	116 - 143	3000	230
SFP 100- 40 EH		2 ½ x 1 ½	162 - 198	3500	230
SFP 100- 20 EH B		3 x 2 ½	108 - 124	3500	230

In line with our policy of continuous product improvement, SFFECO reserves the right to modify specifications without prior notice.

Model Dsg.	Rated Capacity (GPM)	Flange Size (SucXDis) (in)	UL Listed Rated Net Pressure Range (PSI)	Approx Speed (RPM)	Max Working Pressure (PSI)
SFP - 150- 32 EM - 2G	150	3 X 2	95 - 142	2900	239
SFP - 150- 32 EM - 2G		3 X 2	102 - 153	3000	239
SFP - 150- 20 EM - 2G		2 ½ X 2	71 - 90	2900	180
SFP - 150- 20 EM - 2G		2 ½ X 2	76 - 97	3000	180
SFP - 150- 65 EM - 2G		3 X 2 ½	80 - 93	2900	180
SFP - 150- 65 EM - 2G		3 X 2 ½	86 - 99	3000	180
SFP 150- 20 EH		3 x 2 ½	108 - 128	3500	230
SFP 150- 26 EM		2 ½ x 1 ½	124	2900	230
SFP 150- 42 EH		2 ½ x 1 ½	107 - 135	3000	230
SFP 150- 26 EH		2 ½ x 1 ½	156 - 191	3500	230
SFP 150- 20 EH A		2 ½ x 2	102 - 126	3500	230
SFP - 200- 32 EM - 2G	200	3 X 2	89 - 139	2900	239
SFP - 200- 32 EM - 2G		3 X 2	96 - 149	3000	239
SFP - 200- 65 EM - 2G		3 X 2 ½	79 - 91	2900	180
SFP - 200- 65 EM - 2G		3 X 2 ½	85 - 98	3000	180
SFP 200- 20 EH		3 X 2 ½	106 - 127	3500	230
SFP 200- 20 EH A		2 ½ x 2	96 - 120	3500	230
SFP 200- 65 EM		3 X 2 ½	115 - 136	2900	230
SFP - 250- 32 EM - 2G	250	3 X 2	82 - 132	2900	239
SFP - 250- 32 EM - 2G		3 X 2	89 - 143	3000	239
SFP - 250- 42 EM - 2G		4 X 2 ½	87 - 147	2900	239
SFP - 250- 42 EM - 2G		4 X 2 ½	94 - 156	3000	239
SFP - 250- 65 EM - 2G		3 X 2 ½	77 - 90	2900	180
SFP - 250- 65 EM - 2G		3 X 2 ½	83 - 97	3000	180
SFP 250- 26 EM		3 x 2 ½	113 - 134	2900	230
SFP 250- 20 EH		3 x 2 ½	103 - 124	3500	230
SFP - 300- 42 EM - 2G	300	4 X 2 ½	85 - 143	2900	230
SFP - 300- 42 EM - 2G		4 X 2 ½	91 - 154	3000	239
SFP - 300- 65 EM - 2G		3 X 2 ½	75 - 90	2900	180
SFP - 300- 65 EM - 2G		3 X 2 ½	81 - 96	3000	180
SFP 300- 26 EM		3 x 2 ½	110 - 132	2900	230
SFP 300- 20 EH		3 x 2 ½	101 - 123	3500	230
SFP - 400- 31 EM - 2G	400	5 X 3	134 - 218	2900	315
SFP - 400- 31 EM - 2G		5 X 3	143 - 234	3000	315
SFP - 400- 25 EM - 2G		5 X 3	86 - 139	2900	235
SFP - 400- 25 EM - 2G		5 X 3	93 - 149	3000	235
SFP - 400- 54 EM - 2G		5 X 4	137 - 215	2900	315
SFP - 400- 54 EM - 2G		5 X 4	147 - 230	3000	315
SFP - 400- 42 EM - 2G		4 X 2 ½	79 - 141	2900	239
SFP - 400- 42 EM - 2G		4 X 2 ½	86 - 151	3000	239
SFP 400- 26 EM		4 x 3	110 - 133	2900	230
SFP 400- 26 EH		4 x 3	191	3500	240
SFP 400- 32 EM		4 x 3	158 - 200	2900	250
SFP 400- 80 EH		4 x 3	105 - 193	3500	235
SFP - 450- 31 EM - 2G	450	5 X 3	131 - 217	2900	315
SFP - 450- 31 EM - 2G		5 X 3	141 - 232	3000	315
SFP - 450- 25 EM - 2G		5 X 3	85 - 138	2900	235
SFP - 450- 25 EM - 2G		5 X 3	91 - 148	3000	235
SFP - 450- 54 EM - 2G		5 X 4	136 - 214	2900	315
SFP - 450- 54 EM - 2G		5 X 4	146 - 229	3000	315
SFP - 450- 42 EM - 2G		4 X 2 ½	78 - 137	2900	239
SFP - 450 - 42 EM - 2 G		4 X 2 ½	84 - 148	3000	239
SFP 450- 26 EM		4 x 3	109 - 132	2900	230
SFP 450- 26 EH		4 x 3	188	3500	240
SFP 450- 32 EM		4 x 3	154 - 198	2900	250
SFP 450- 80 EH		4 x 3	102 - 190	3500	235

In line with our policy of continuous product improvement, SFFECO reserves the right to modify specifications without prior notice.

Model Dsg.	Rated Capacity (GPM)	Flange Size (SucXDis) (in)	UL Listed Rated Net Pressure Range (PSI)	Approx Speed (RPM)	Max Working Pressure (PSI)
SFP - 500- 31 EM - 2G	500	5 X 3	129 - 217	2900	315
SFP - 500- 31 EM - 2G		5 X 3	139 - 232	3000	315
SFP - 500- 2 5 EM - 2G		5 X 3	83 - 136	2900	235
SFP - 500- 2 5 EM - 2G		5 X 3	90 - 146	3000	235
SFP - 500- 54 EM - 2G		5 X 4	136 - 214	2900	315
SFP - 500- 54 EM - 2G		5 X 4	146 - 229	3000	315
SFP - 500- 4 2 EM - 2G		4 X 2 ½	143	3000	239
SFP - 500- 20 EM - 2G		6 X 5	68 - 84	2900	175
SFP - 500- 20 EM - 2G		6 X 5	73 - 90	3000	175
SFP - 500- 20 EH - 2G		6 X 5	100 - 121	3500	210
SFP - 500- 20 EH - 2G		6 X 5	105 - 128	3600	210
SFP - 500- 26 EM - 2G		6 X 5	118 - 136	2900	230
SFP - 500- 26 EM - 2G		6 X 5	126 - 146	3000	230
SFP - 500- 26 EH - 2G		6 X 5	168 - 199	3500	290
SFP - 500- 26 EH - 2G		6 X 5	178 - 210	3600	290
SFP 500- 26 EM		4 x 3	108 - 131	2900	230
SFP 500- 26 EH		4 x 3	185	3500	240
SFP 500- 32 EM		4 x 3	149 - 194	2900	250
SFP 500- 80 EH		4 x 3	99 - 188	3500	235
SFP 500- 12 EM		5 x 4	111 - 133	2900	225
SFP 500- 13 EM		5 x 4	122 - 210	2900	245
SFP 750- 26 EM	750	5 x 4	102 - 127	2900	225
SFP 750- 32 EM		5 x 4	122 - 207	2900	245
SFP - 750- 54 EM - 2G		5 X 4	131 - 208	2900	315
SFP - 750- 54 EM - 2G		5 X 4	141 - 223	3000	315
SFP - 750- 20 EM - 2G		6 X 5	65 - 81	2900	175
SFP - 750- 20 EM - 2G		6 X 5	70 - 87	3000	175
SFP - 750- 20 EH - 2G		6 X 5	97 - 120	3500	210
SFP - 750- 20 EH - 2G		6 X 5	103 - 127	3600	210
SFP - 750- 26 EM - 2G		6 X 5	116 - 135	2900	230
SFP - 750- 26 EM - 2G		6 X 5	125 - 145	3000	230
SFP - 750- 26 EH - 2G		6 X 5	167 - 198	3500	290
SFP - 750- 26 EH - 2G		6 X 5	177 - 210	3600	290
SFP - 1000- 5 4 EM - 2 G	1000	5 X 4	122 - 200	2900	315
SFP - 1000- 5 4 EM - 2 G		5 X 4	132 - 215	3000	239
SFP - 1000- 2 0 EM - 2 G		6 X 5	60 - 78	2900	175
SFP - 1000- 2 0 EM - 2 G		6 X 5	65 - 84	3000	175
SFP - 1000- 2 0 EH - 2 G		6 X 5	92 - 116	3500	210
SFP - 1000- 2 0 EH - 2 G		6 X 5	98 - 123	3600	210
SFP - 1000- 2 6 EM - 2 G		6 X 5	113 - 133	2900	230
SFP - 1000- 2 6 EM - 2 G		6 X 5	121 - 143	3000	230
SFP - 1000- 2 6 EH - 2 G		6 X 5	164 - 196	3500	290
SFP - 1000- 2 6 EH - 2 G		6 X 5	174 - 208	3600	290


Notes:

- ❖ All Pumps are hydrostatically tested to minimum of 150% of its maximum working pressure and can with stand double the max. working pressure
- ❖ All Pumps have clock-wise rotation when viewed from the driver side
- ❖ All pumps are horizontal single stage pumps
- ❖ "The rated speed marked on the pump can vary within +/- 4% of the listed / approved rated speed example: 3000RPM pump can be driven with 2900 RPM drives."
- ❖ UL listed pumps compliant to NFPA 20 design and installation requirements.

In line with our policy of continuous product improvement, SFFECO reserves the right to modify specifications without prior notice.

CENTRIFUGAL FIRE PUMPS

SPLIT CASE (50/60 HZ)

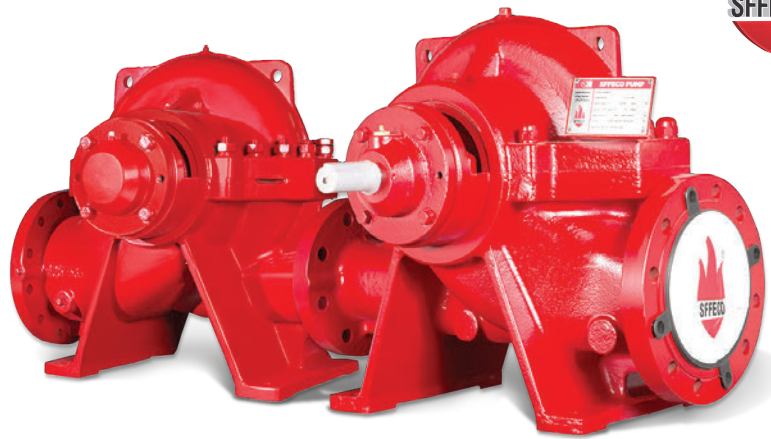

General Features

- ❖ Volute Type Thru-Bore Casing
- ❖ Frame-Mounted Design
- ❖ Small Footprint Ideal for Retrofit
- ❖ Heavy Duty with Heavy Wall thickness
- ❖ 100% Hydrostatic & Performance Tested
- ❖ Dynamically Balanced Double Suction Impeller

Casing	Cast Iron / Ductile Iron
Impeller	Bronze / Duplex (upon request)
Shaft	Alloy Steel / Stainless Steel / Duplex (upon request)
Capacity	150GPM to 3500 GPM
Pressure	88 to 335 PSI
Max. Working Pressure	220 to 410 PSI
Speed	2900, 3000, 3500 and 3600 RPM

Model Dsg.	Rated Capacity (GPM)	Flange Size (SucXDis) (in)	UL Listed Rated Net Pressure Range (PSI)	Approx Speed (RPM)	Max Working Pressure (PSI)
SFP 150- 25SH	150	6 x 4	114 - 208	3 500	300
			121 - 220	3600	
SFP 150- 40SM		6 x 4	206 - 289	2900	385
			221 - 310	3000	
SFP 150- SN 3 1SH		6 x 4	226 - 316	3 500	405
			239 - 334	3600	
SFP 150- 28SM		5 X 3	101 - 156	2900	239
	200		108 - 167	3000	
SFP 150- 35SM		5 x 3	125 - 224	2900	318
			133 - 240	3000	
SFP 200- 25SH		6 x 4	114 - 207	3 500	300
			121 - 219	3600	
SFP 200- 40SM		6 x 4	206 - 289	2900	385
			220 - 309	3000	
SFP 200- SN 3 1SH		6 x 4	226 - 317	3 500	405
	250		239 - 335	3600	
SFP 200- 28SM		5 x 3	101 - 156	2900	239
			108 - 167	3000	
SFP 200- 35SM		5 x 3	124 - 224	2900	318
			133 - 240	3000	
SFP 250- 25SH		6 x 4	114 - 207	3 500	300
			121 - 219	3600	
SFP 250- 40SM		6 x 4	206 - 288	2900	385
	250		220 - 308	3000	
SFP 250- SN 3 1SH		6 x 4	226 - 317	3 500	405
			239 - 335	3600	
SFP 250- 28SM		5 x 3	122 - 222	2900	239
			131 - 237	3000	
SFP 250- 35SM		5 x 3	123 - 223	2900	318
			132 - 239	3000	

In line with our policy of continuous product improvement, SFFECO reserves the right to modify specifications without prior notice.

Model Dsg.	Rated Capacity (GPM)	Flange Size (SucXDis) (in)	UL Listed Rated Net Pressure Range (PSI)	Approx Speed (RPM)	Max Working Pressure (PSI)
SFP 300- 35SM	300	5 x 3	122 - 222	2900	319
SFP 300- 25SH		6 x 4	114 - 206	3 500	300
SFP 300- 40 SM		6 x 4	206 - 286	2900	385
SFP 300- SN 3 1SH		6 x 4	226 - 316	3 500	405
SFP 300- 28SM		5 x 3	100 - 156	2900	239
SFP 400- 35SM		5 x 3	120 - 219	2900	319
SFP 400- 28SM		5 x 3	98 - 155	2900	239
SFP 400- 25SH	400	6 x 4	114 - 206	3 500	300
SFP 400- 40SM		6 x 4	206 - 285	2900	385
SFP 400- SN 3 1SH		6 x 4	225 - 314	3 500	405
SFP 450- 37SM - 2G		6 x 4	220 - 293	2900	410
SFP 450- 28SM		5 x 3	96 - 155	2900	239
SFP 450- 25SH		6 x 4	113 - 206	3 500	300
SFP 450- 40SM		6 x 4	205 - 284	2900	385
SFP 450- SN 3 1SH	450	6 x 4	224 - 313	3 500	405
SFP 500- 37SM - 2G		6 x 4	216 - 296	2900	410
SFP 500- 37SM		5 x 3	134 - 233	2900	290
SFP 500- 3 1SM		6 x 4	137 - 203	2900	220
SFP 500- 28SM		5 x 3	94 - 154	2900	239
SFP 500- 25SH		6 x 4	113 - 205	3500	300
SFP 500- 32SM		6 x 4	119 - 198	2900	290
SFP 500- 40SM	500	6 x 4	204 - 284	2900	385
SFP 500- SN 3 1SH		6 x 4	224 - 312	3500	405
SFP 750- 37SM - 2G		6 x 4	202 - 276	2900	410
SFP 750- 3 1SM		6 x 4	131 - 201	2900	220
SFP 750- 25SH		6 x 4	106 - 199	3500	300
SFP 750- 32SM		6 x 4	111 - 194	2900	290
SFP 750- 29SM		8 x 5	148 - 182	2900	268
SFP 75040SM	750	6 x 4	199 - 281	2900	385
SFP 750- SN 3 1SH		6 x 4	218 - 309	3500	405
SFP 750- 12SH		8 x 5	148 - 266	3500	362
SFP 750- EL3 1SH		6 x 4	190 - 290	3500	377
			201 - 306	3600	

In line with our policy of continuous product improvement, SFFECO reserves the right to modify specifications without prior notice.

Model Dsg.	Rated Capacity (GPM)	Flange Size (Suc x Dis) (in)	UL Listed Rated Net Pressure Range (PSI)	Approx Speed (RPM)	Max Working Pressure (PSI)
SFP 1000- 36SM - 2G	1000	8 x 5	180 - 290	2900	405
SFP 1000- 3 1SM		6 x 4	194 - 310	3000	220
SFP 1000- 29SM		8 x 5	134 - 195	3000	268
SFP 1000- 30SM		8 x 5	143 - 181	2900	275
SFP 1000- 40SM		6 x 4	154 - 194	3000	385
SFP 1000- 12SH		8 x 5	98 - 172	3000	362
SFP 1000- 15SH		8 x 5	106 - 185	3600	300
SFP 1000- 36SM		8 x 5	191 - 272	3500	375
SFP 1000- EL3 1SH		6 x 4	206 - 292	3000	377
SFP 1250- 36SM - 2G	1250	8 x 5	146 - 264	2900	405
SFP 1250- 29SM - 2G		8 x 6	155 - 280	3000	250
SFP 1250- 29SM		8 x 5	152 - 205	2900	268
SFP 1250-30SM		8 x 5	160 - 217	3000	275
SFP 1250- 12SH		8 x 5	163 - 278	3500	362
SFP 1250- 15SH		8 x 6	175 - 298	3600	300
SFP 1250- 36SM		8 x 5	187 - 289	3500	375
SFP 1250- EL3 1SH		6 x 4	199 - 306	3000	377
SFP 1500- 29SM - 2G	1500	8 x 6	171 - 281	2900	250
SFP 1500- 6 1SL5- 2G		12 x 10	184 - 302	3000	260
SFP 1500- 6 1SL6- 2G		12 x 10	95 - 156	1480	260
SFP 1500- 30SM		8 x 5	102 - 167	1500	239
SFP 1500- 15SH		8 x 6	137 - 177	1760	300
SFP 1500- 36SM		8 x 5	148 - 191	1800	375
SFP 2000- 15SH	2000	8 x 6	94 - 170	2900	300
SFP 2000- 29SM - 2G		8 x 6	101 - 182	3000	250
SFP 2000- 6 1SL5- 2G		12 x 10	207 - 264	3500	260
SFP 2000- 6 1SL6- 2G		12 x 10	219 - 279	3600	260
SFP 2500- 29SM - 2G	2500	8 x 6	150 - 205	3500	250
SFP 2500- 6 1SL5- 2G		12 x 10	159 - 217	3600	260
SFP 2500- 6 1SL6- 2G		12 x 10	155 - 278	1760	260
SFP 3000- 6 1SL5- 2G	3000	12 x 10	168 - 298	1800	260
SFP 3000- 6 1SL6- 2G		12 x 10	178 - 287	1480	260
SFP 3500- 6 1SL5- 2G	3500	12 x 10	190 - 304	1500	260
SFP 3500- 6 1SL6- 2G		12 x 10	100 - 155	1760	260
		12 x 10	105 - 167	1800	260
		12 x 10	99 - 164	1480	260
		12 x 10	101 - 168	1500	260
		12 x 10	142 - 168	1760	260
		12 x 10	149 - 176	1800	260
		12 x 10	88 - 167	2900	250
		12 x 10	95 - 179	3000	260
		12 x 10	149 - 207	1480	260
		12 x 10	158 - 218	1500	260
		12 x 10	153 - 275	1760	260
		12 x 10	164 - 295	1800	260
		12 x 10	145 - 203	1480	260
		12 x 10	154 - 215	1500	260
		12 x 10	95 - 152	1760	260
		12 x 10	103 - 163	1800	260
		12 x 10	94 - 162	1480	260
		12 x 10	97 - 166	1500	260
		12 x 10	136 - 165	1760	260
		12 x 10	142 - 173	1800	260
		12 x 10	89 - 145	2900	250
		12 x 10	95 - 156	3000	260
		12 x 10	89 - 158	1480	260
		12 x 10	92 - 162	1500	260
		12 x 10	132 - 163	1760	260
		12 x 10	139 - 170	1800	260
		12 x 10	104 - 153	1480	260
		12 x 10	108 - 157	1500	260
		12 x 10	125 - 156	1760	260
		12 x 10	131 - 164	1800	260
		12 x 10	103 - 144	1485	260
		12 x 10	106 - 148	1500	260
		12 x 10	119 - 148	1760	260
		12 x 10	125 - 156	1800	260

Notes:

- ❖ All Pumps are hydrostatically tested to minimum of 150% of its maximum working pressure and can with stand double the max. working pressure
- ❖ All Pumps have clock-wise rotation when viewed from the driver side
- ❖ All pumps are horizontal single stage pumps
- ❖ "The rated speed marked on the pump can vary within +/- 4% of the listed / approved rated speed example: 3000RPM pump can be driven with 2900 RPM drives."
- ❖ UL listed pumps compliant to NFPA 20 design and installation requirements.

In line with our policy of continuous product improvement, SFFECO reserves the right to modify specifications without prior notice.


CENTRIFUGAL FIRE PUMPS VERTICAL TURBINE (50/60 HZ)



General Features

- ❖ Designed and built as per UL 448 and NFPA20
- ❖ Dynamically Balanced Impeller
- ❖ Constructed in variety of metallurgies
- ❖ Available 50Hz and 60Hz
- ❖ Drivers with gear boxes at electrical and diesel speed
- ❖ Designed for easy maintenance
- ❖ Open line shaft
- ❖ Packaged systems available
- ❖ Self-Venting Design eliminates vapor lock
- ❖ Efficiently Designed Shaft
- ❖ Heavy wall thickness
- ❖ Sealing arrangement is packing design
- ❖ Modular Construction
- ❖ Space-saver design

Capacity	200GPM to 2000 GPM
Pressure	40 to 359 PSI
Max. Working Pressure	290 to 395 PSI
Speed	1450, 1480, 1760, 1780, 2900, 2980, 2950 & 3000 RPM

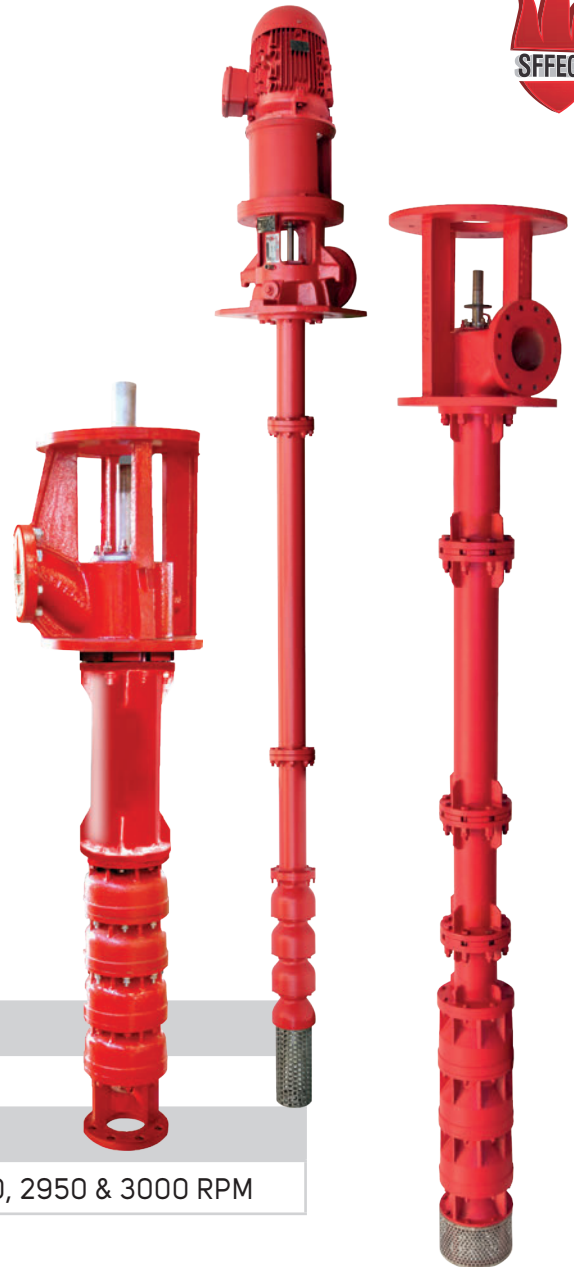

Model Dsg.	Rated Capacity (GPM)	UL Listed Rated Net Pressure Range (PSI)	Number of Stages	Approx Speed (RPM)
SFP - 200 - 70VT	200	40 - 289	2 - 12	1480
SFP - 200 - 70VT		48 - 348	2 - 10	1760
SFP - 200 - 30VT		60 - 305	2 - 6	2900
SFP - 200 - 30VT		63 - 323	2 - 6	2980
SFP - 200 - 30VT		64 - 327	2 - 6	3000
SFP - 750 - 70- VT	250	40 - 248	2 - 10	1480
SFP - 250 - 70VT		40 - 290	2 - 12	1480
SFP - 250 - 70VT		48 - 345	2 - 10	1760
SFP - 250 - 30VT		60 - 299	2 - 6	2900
SFP - 250 - 30VT		63 - 317	2 - 6	2980
SFP - 250 - 30VT		64 - 321	2 - 6	3000
SFP - 750 - 70- VT		40 - 248	2 - 10	1480
SFP - 750 - 70- VT		48 - 351	2 - 10	1760

In line with our policy of continuous product improvement, SFFECO reserves the right to modify specifications without prior notice.

Model Dsg.	Rated Capacity (GPM)	UL Listed Rated Net Pressure Range (PSI)	Number of Stages	Approx Speed (RPM)
SFP - 300 - 70VT	300	40 - 290	2 - 12	1480
SFP - 300 - 70VT		47 - 341	2 - 10	1760
SFP - 300 - 30VT		58 - 295	2 - 6	2900
SFP - 300 - 30VT		61 - 312	2 - 6	2980
SFP - 300 - 30VT		62 - 316	2 - 6	3000
SFP - 750 - 70- VT		40 - 247	2 - 10	1480
SFP - 750 - 70- VT		48 - 351	2 - 10	1760
SFP - 400 - 70VT	400	40 - 283	2 - 12	1480
SFP - 400 - 70VT		46 - 336	2 - 10	1760
SFP - 400 - 30VT		54 - 285	2 - 6	2900
SFP - 400 - 30VT		57 - 302	2 - 6	2980
SFP - 400 - 30VT		58 - 306	2 - 6	3000
SFP - 750 - 70- VT		40 - 244	2 - 10	1480
SFP - 750 - 70- VT		46 - 349	2 - 10	1760
SFP - 450 - 70VT	450	40 - 279	2 - 12	1480
SFP - 450 - 70VT		45 - 333	2 - 10	1760
SFP - 450 - 30VT		52 - 279	2 - 6	2900
SFP - 450 - 30VT		56 - 296	2 - 6	2980
SFP - 450 - 30VT		56 - 300	2 - 6	3000
SFP - 750 - 70- VT		40 - 241	2 - 10	1480
SFP - 750 - 70- VT		44 - 347	2 - 10	1760
SFP - 500 - 70VT	500	40 - 276	2 - 12	1480
SFP - 500 - 70VT		44 - 331	2 - 10	1760
SFP - 500 - 30VT		49 - 273	2 - 6	2900
SFP - 500 - 30VT		53 - 290	2 - 6	2980
SFP - 500 - 30VT		54 - 294	2 - 6	3000
SFP - 750 - 70- VT		40 - 236	2 - 10	1480
SFP - 750 - 70- VT		44 - 343	2 - 10	1760
SFP - 750 - 70- VT		40 - 320	2 - 10	1760
SFP - 1500- 80- VT	750	42 - 254	2 - 8	1480
SFP - 750- 70VT		40 - 253	2 - 12	1480
SFP - 750- 70VT		40 - 309	2 - 10	1760
SFP - 750- 80VT		43 - 306	2 - 10	1480
SFP - 750- 80VT		62 - 359	2- 8	1760
SFP - 750- 30VT		72 - 79	2	2900
SFP - 750- 30VT		108 - 119	3	2900
SFP - 750- 30VT		144 - 159	4	2900
SFP - 750- 30VT		180 - 198	5	2900
SFP - 750- 30VT		216 - 238	6	2900
SFP - 750- 30VT		150 -166	4	2950
SFP - 750- 30VT		187 - 207	5	2950
SFP - 750- 30VT		225 - 249		2950
SFP - 750- 30VT		83-87	2	3000
SFP - 750- 30VT		117 - 130	3	3000
SFP - 750- 30VT		167 - 173	4	3000
SFP - 1000- 70VT	1000	56	3	1480
SFP - 1000- 70VT		73	4	1480
SFP - 1000- 70VT		88	5	1480
SFP - 1000- 70VT		112	6	1480
SFP - 1000- 70VT		131	7	1480
SFP - 1000- 70VT		145	8	1480
SFP - 1000- 70VT		160	9	1480
SFP - 1000- 70VT		187	10	1480
SFP - 1000- 70VT		203	11	1480
SFP - 1000- 70VT		218	12	1480
SFP - 1000- 70VT		102	6	1450

In line with our policy of continuous product improvement, SFFECO reserves the right to modify specifications without prior notice.

Model Dsg.	Rated Capacity (GPM)	UL Listed Rated Net Pressure Range (PSI)	Number of Stages	Approx Speed (RPM)
SFP - 1000- 70VT	1000	117	7	1450
SFP - 1000- 70VT		174	10	1450
SFP - 1000- 70VT		189	11	1450
SFP - 1000- 70VT		57	2	1760
SFP - 1000- 70VT		80	3	1760
SFP - 1000- 70VT		106	4	1760
SFP - 1000- 70VT		133	5	1760
SFP - 1000- 70VT		160	6	1760
SFP - 1000- 70VT		189	7	1760
SFP - 1000- 70VT		218	8	1760
SFP - 1000- 70VT		247	9	1760
SFP - 1000- 70VT		276	10	1760
SFP - 1000- 70VT		58	2	1780
SFP - 1000- 70VT		87	3	1780
SFP - 1000- 70VT		116	4	1780
SFP - 1000- 70VT		145	5	1780
SFP - 1000- 70VT		175	6	1780
SFP - 1000- 70VT		204	7	1780
SFP - 1000- 70VT		233	8	1780
SFP - 1000- 70VT		262	9	1780
SFP - 1000- 70VT		291	10	1780
SFP - 1000- 80VT		40 - 287	2 - 10	1480
SFP - 1000- 80VT		59-343	2 - 8	1760
SFP - 1000- 90VT		57 - 328	2 - 7	1480
SFP - 1000- 90VT		85 - 337	2 - 5	1760
SFP - 1500- 80- VT		40 - 244	2 - 8	1480
SFP - 1500- 80- VT		58 - 355	2 - 8	1760
SFP - 2000- 90- VT		58 - 239	2 - 5	1480
SFP - 1250- 80VT	1250	40 - 273	2 - 10	1480
SFP - 1250- 80VT		54 - 330	2 - 8	1760
SFP - 1250- 90VT		55 - 317	2 - 7	1480
SFP - 1250- 90VT		80 - 329	2 - 5	1760
SFP - 1500- 80- VT		40 - 225	2 - 8	1480
SFP - 1500- 80- VT		54 - 341	2 - 8	1760
SFP - 2000- 90- VT		56 - 230	2 - 5	1480
SFP - 2000- 90- VT		80 - 335	2 - 5	1760
SFP - 1500- 80VT	1500	84 - 254	4 - 10	1480
SFP - 1500- 80VT		60 - 76	3	1480
SFP - 1500- 80VT		49 - 312	2 - 8	1760
SFP - 1500- 90VT		52 - 309	2 - 7	1480
SFP - 1500- 90VT		78 - 314	2 - 5	1760
SFP - 1500- 80- VT		58 - 317	2 - 8	1760
SFP - 2000- 90- VT		52 - 225	2 - 5	1480
SFP - 2000- 90- VT		78 - 325	2 - 5	1760
SFP - 2000- 90- VT	2000	72 - 312	2 - 5	1760
SFP - 2000- 90VT		71 - 82	2	1480
SFP - 2000- 90VT		100 - 123	3	1480
SFP - 2000- 90VT		133 - 165	4	1480
SFP - 2000- 90VT		167 - 288	5 - 7	1480
SFP - 2000- 90VT		96 - 118	3	1450
SFP - 2000- 90VT		128 - 157	4	1450
SFP - 2000- 90VT		72 - 302	2 - 5	1760

Notes:

- ❖ All Pumps are hydrostatically tested to minimum of 150% of its maximum working pressure and can with stand double the max. working pressure
- ❖ All Pumps have clock-wise rotation when viewed from the driver side
- ❖ All pumps are horizontal single stage pumps
- ❖ "The rated speed marked on the pump can vary within +/- 4% of the listed / approved rated speed example: 3000RPM pump can be driven with 2900 RPM drives."
- ❖ UL listed pumps compliant to NFPA 20 design and installation requirements.

In line with our policy of continuous product improvement, SFFECO reserves the right to modify specifications without prior notice.

FIRE PUMP SYSTEM COMPONENTS



DIESEL TANKS

All Sffeco steel above ground tanks for flammable and combustible liquid are assembled and tested to all requirements as follows

- ❖ ANSI/UL-142-Complaint.
- ❖ Installation standard compliance to NFPA 30, NFPA30A and NFPA30B

Primary Containment Tanks

- ❖ Horizontal Cylindrical Construction (Capacity upto 75000 Gallon)
- ❖ Vertical Cylindrical Construction (Capacity upto 60000 Gallon)
- ❖ Rectangular Construction (Capacity upto 550 Gallon)

Secondary Containment Tanks

- ❖ Horizontal Cylindrical Construction (Capacity upto 75000 Gallon)
- ❖ Vertical Cylindrical Construction (Capacity upto 60000 Gallon)



JOCKEY PUMPS

Jockey pumps are small, motor driven pumps used in conjunction with main fire pumps to compensate for minor leaks in the fire protection system and automatically maintain stand-by pressure. This reduces wear on the main pump and controller caused by unnecessary, frequent operation. Jockey Pump controllers are available for across the-line starting.



FIRE PUMP CONTROLLERS

- ❖ ELECTRICAL PUMP CONTROLLER
- ❖ JOCKEY PUMP CONTROLLER
- ❖ DIESEL PUMP CONTROLLER
- ❖ ALARM PANEL

All Fire Pump Controllers are factory assembled, wired, tested as a unit and comply with all requirements of the latest edition of NFPA-20 (Centrifugal Fire Pumps) and NFPA-70 (National Electrical Code). Controllers are listed by Underwriters Laboratories, Inc., in accordance with UL218, Standard for Fire Pump Controllers, CSA, and Standard for Industrial Control Equipment (CUL) and approved by Factory Mutual (FM). All controllers are Y2K compliant.

This component plays a vital role in operation of fire pumps as it controls the entire system. It is selected as per customer choice if any, otherwise it can be either TORNATECH, OR EATON.




In line with our policy of continuous product improvement, SFFECO reserves the right to modify specifications without prior notice.

DIESEL DRIVEN & ELECTRICAL MOTOR

SFFECO is an established well reputed manufacturer of Premium Custom Engine Driven Centrifugal Fire Pump Skids. We specialized in designing and developing packages in accordance to NFPA 20 requirements with Listed & Approved Drivers.

- ❖ SFFECO offers listed Centrifugal Fire Pump Skids that meet every fire protection need.
- ❖ Driven by Listed & Approved Diesel Engines & Electric Motors.
- ❖ Skid Packages are pre-tested and inspected thoroughly before release to customers.
- ❖ Well aligned and coupled for direct operation
- ❖ One piece base plate with anchor bolt holes
- ❖ Engineered, coated, hot rolled mild steel to resist corrosion and abrasion
- ❖ Heavy fabricated C-Channel Structure constructed to provide proper alignment of pump with diesel engine or pump
- ❖ Heavy fabricated steel base plate rigidly constructed to provide proper alignment of pump and electric motor
- ❖ Compact skid design with small foot-print for retrofit
- ❖ High standard of quality in material construction finish and workmanship

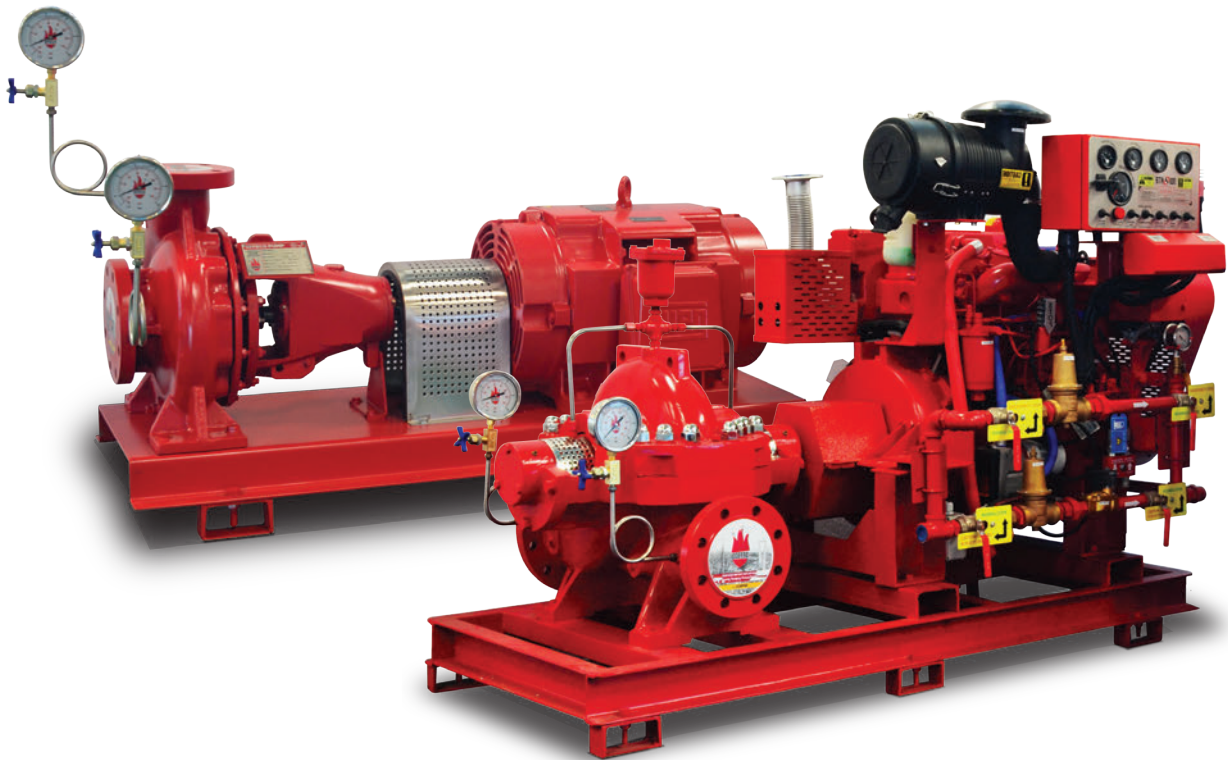

SFFECO maintains its standard with using it's proudly own listed & approved Black Stallion Diesel Engines & High efficiency and Centrifugal Fire Pumps to package Heavy Duty and High Quality Compact Skids.

Our Listed and Approved Fire Pumps can also be coupled with any other Electric Motor and Listed Diesel Engine of any specific brands as per customer's requirement.

In line with our policy of continuous product improvement, SFFECO reserves the right to modify specifications without prior notice.



ORDER FORM

Technical Data



GENERAL INFORMATION

CLIENT NAME: _____

PROJECT _____ LOCATION: _____

PURCHASE ORDER NO.: _____ SALES ORDER NO.: _____

CENTRIFUGAL PUMP DETAILS

☐ END SUCTION PUMP

☐ HORIZONTAL SPLIT CASE PUMP

FLOW: _____ GPM PRESSURE _____ BAR SPEED _____ RPM

PUMP MODEL NO.: _____ DUTY POINT CURVE NO.: SDC _____

MOTOR DRIVER DETAILS

MOTOR POWER _____ HP MOTOR DRIVEN SKID NO.: _____

VOLTAGE: _____ V _____ Ph _____ Hz _____ RPM

STARTER CONNECTION:

☐ DIRECT ON-LINE (DOL) ☐ START DELTA (Y-Δ) ☐ OTHERS: _____

MOTOR PROTECTION:

☐ OPD (IP 23) ☐ TEFC (IP 55) BRAND: _____

ELECTRIC MOTOR CONTROLLER:

BRAND: _____ CONTROLLER MODEL NO.: _____

PROTECTION: ☐ NEMA 2 ☐ OTHERS: _____

TYPE: ☐ GPA ☐ GPY ☐ GPL ☐ OTHERS: _____

OTHER SPECIFIC REQUIREMENTS:

**Remarks: The pump & Power selection made to cover the 150% of the rated capacity, where factory is ready to provide higher selection subject to AHJ request & approval.

ENGINE DRIVER DETAILS

ENGINE POWER: RPM STARTER VOLTAGE: ☐ 12 VDC ☐ 24 VDC

BRAND: ENGINE MODEL NO.:

DIESEL DRIVEN SKID NO.:

DIESEL ENGINE CONTROLLER:

BRAND: CONTROLLER MODEL NO.:

TYPE: ☐ GPD PROTECTION: ☐ NEMA 2 ☐ OTHERS:

OTHER SPECIFIC REQUIREMENTS:

****Remarks:** The pump & Power selection made to cover the 150% of the rated capacity, where factory is ready to provide higher selection subject to AHJ request & approval.

JOCKEY PUMP DETAILS

BRAND: JOCKEY MODEL NO.:

POWER: V Ph Hz

FLOW: PRESSURE SPEED RPM

JOCKEY PUMP CONTROLLER:

BRAND: CONTROLLER MODEL NO.:

TYPE: ☐ JP3 PROTECTION: ☐ NEMA 2 ☐ OTHERS:

OTHER SPECIFIC REQUIREMENTS:

****Remarks:** The Jockey Pump capacity showing in the quotation is indicative only, While factory has the right to select a different model/flow rate capacity assuring that will be between 1-10% from the flow rate capacity of the main pump.

ACCESSORIES

STANDARD ACCESSORIES:

Included in all SFFECO UL Listed Fire Pump Systems

- Discharge and Suction Gauges
- Air Release Valve (Split Case Pump Only)
- Casing Relief Valve
- Battery
- Battery Cable and Clamps
- Flexible Fuel Hoses
- Diesel Tank and Accessories
 - Ball Valve
 - Fuel Level Gauge
 - SFFECO Tank Breather

OPTIONAL ACCESSORIES:

- | | |
|--|---|
| ☐ Flow Meter | ☐ Flexible Connector |
| ☐ Main Relief Valve | ☐ Eccentric Reducer |
| ☐ Waste Cone | ☐ Concentric Reducer |
| ☐ Check Valve | ☐ Hose Valves with Cap and Chain |
| ☐ Discharge TEE | ☐ Ball Drip Valve |

Isolating Valve

- ☐ OS&Y Gate Valve ☐ Butterfly Valve

If Flow and pressure is not known; please send the brief description of application (hazard).

Pump location, connection system (hydrant, sprinkler.. Etc), as well as the maximum height to generate and recommend the suitable pump for the application

In line with our policy of continuous product improvement, SFFECO reserves the right to modify specifications without prior notice.



ORDER FORM

Technical Data FOR VERTICAL PUMPS



GENERAL INFORMATION

CLIENT NAME: _____

PROJECT _____ LOCATION: _____

PURCHASE ORDER NO.: _____ SALES ORDER NO.: _____

CENTRIFUGAL PUMP DETAILS

MODEL NO.: _____ GPM

CURVE NO.: _____


FLOW: _____ GPM

PRESSURE: _____ BAR(Psi)

SPEED: _____ RPM

STAGES: _____

A = _____ MM
B = _____ MM
C = _____ MM
D = _____ MM
E = _____ MM
F = _____ MM
G = _____ MM
H = _____ MM
I = _____ MM

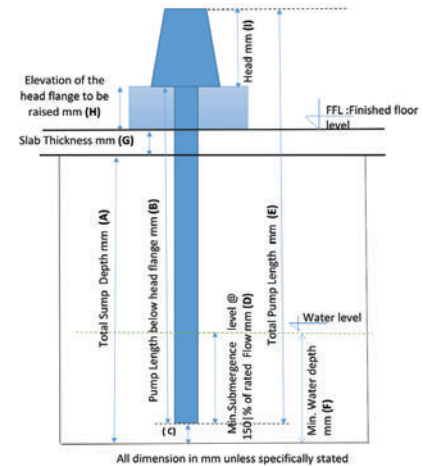

ELECTRICAL SKID DETAILS

ELECTRICAL SKID NO.: _____

TYPE : ☐ HORIZONTAL MOTOR
☐ VERTICAL MOTOR

BRAND : _____

MOTOR DETAILS : POWER _____ HP SPEED _____ RPM FREQUENCY _____ HZ
VOLTAGE _____ V PHASE _____ SERVICE FACTOR _____

MOTOR PROTECTION: ☐ ODP (IP23) ☐ WP-1 ☐ TEFC (IP55) ☐ OTHERS _____

MOTOR EFFICIENCY: ☐ IE1 ☐ IE2 ☐ IE3 ☐ OTHERS _____

STARTER CONNECTION: ☐ DIRECT ON LIN (DOL) ☐ STAR-DELTA ☐ OTHERS _____

☐ GEAR DRIVE DETAIL FOR HORIZONTAL MOTOR

■ GEAR DRIVE MAKE : _____
■ GEAR DRIVE MODEL NO.: _____
■ GEAR DRIVE SHAFT MODEL NO.: _____
■ GEAR DRIVE SHAFT BX SIZE(MM): _____
■ GEAR DRIVE NOMINAL RATIO : _____
■ GEAR DRIVE ACTUAL RATIO : _____
■ GEAR DRIVE INPUT SPEED (RPM): _____
■ GEAR DRIVE OUTPUT SPEED _____
■ GEAR DRIVE COUPLING SIZE(MMXMM) : _____
■ GD CARDAN SHAFT MODEL NO.: _____

☐ VERTICAL MOTOR DETAIL

■ MOTOR TYPE : _____
■ MOTOR MAKE : _____
■ MOTOR MODEL NO.: _____
■ MOTOR SHAFT MODEL NO.: _____
■ MOTOR SHAFT BX SIZE(MM) : _____
■ MOTOR OUTPUT SPEED (RPM) : _____
■ MOTOR COUPLING SIZE (MMXMM) : _____
■ RATCHET TYPE : _____
■ DIRECTION OF ROTATION(TOP VIEW) : _____
■ INSULATION CLASS : _____

ELECTRICAL MOTOR CONTROLLER: BRAND _____ CONTROLLER MODEL NUMBER _____

PROTECTION : ☐ _____ OTHERS ☐ _____ TYPE : ☐ GPA ☐ GPY ☐ GPL ☐ OTHERS

OTHER SPECIFIC REQUIREMENTS:

NOTE: THE PUMP AND PUMP DRIVER SELECTION IS MADE ON THE BASIS OF MAXIMUM HORSEPOWER OF THE PUMP WHERE ACCEPTED BY AHJ, SELECTION CAN BE PROVIDED AT POWER REQUIRED AT 150% OF THE RATED FLOW.

In line with our policy of continuous product improvement, SFFECO reserves the right to modify specifications without prior notice.

ENGINE DRIVER DETAILS

ELECTRICAL SKID NO.:

ENGINE POWER: HP RPM

STARTER VOLTAGE: ☐ 12 VDC ☐ 24 VDC BRAND: ENGINE MODEL NO.:

☐ GEAR DETAIL FOR DIESEL ENGINE :

▪ GEAR DRIVE MAKE :		▪ GEAR DRIVE MODEL NO.:	
▪ GEAR DRIVE SHAFT MODEL NO.:		▪ GEAR DRIVE SHAFT BX SIZE (MM):	
▪ GEAR DRIVE NOMINAL RATIO.:		▪ GEAR DRIVE ACTUAL RATIO :	
▪ GEAR DRIVE INPUT SPEED (RPM):		▪ GEAR DRIVE OUTPU SPEED:	
▪ GEAR DRIVE COUPLING SIZE (MMXMM) :		▪ GD CARDAN SHAFT MODEL NO. :	

☐ GEAR DETAIL FOR DIESEL ENGINE :

BRAND : CONTROLLER MODEL NO.: PROTECTION:

BRAND : TYPE : ☐ GPD

OTHER SPECIFIC REQUIREMENTS:

NOTE: THE PUMP AND PUMP DRIVER SELECTION IS MADE ON THE BASIS OF MAXIMUM HORSEPOWER OF THE PUMP WHERE ACCEPTED BY AHJ, SELECTION CAN BE PROVIDED AT POWER REQUIRED AT 150% OF THE RATED FLOW.

JOCKEY PUMP DETAILS

BRAND: JOCKEY MODEL NO.:

POWER: HP VOLTAGE: V Ph Hz

FLOW: GPM PRESSURE BAR (psi) SPEED RPM

JOCKEY PUMP CONTROLLER:

BRAND: CONTROLLER MODEL NO.:

TYPE: ☐ JP3 PROTECTION: ☐ NEMA 2 ☐ OTHERS:

OTHER SPECIFIC REQUIREMENTS:

ACCESSORIES

STANDARD ACCESSORIES:

Included in all SFFECO UL Listed Fire Pump Systems

- Discharge and Suction Gauges
- Air Release Valve (Split Case Pump Only)
- Casing Relief Valve
- Battery
- Battery Cable and Clamps
- Flexible Fuel Hoses
- Diesel Tank and Accessories
- Ball Valve
- Fuel Level Gauge
- SFFECO Tank Breather

OPTIONAL ACCESSORIES:

- | | |
|--|---|
| ☐ Flow Meter | ☐ Flexible Connector |
| ☐ Main Relief Valve | ☐ Eccentric Reducer |
| ☐ Waste Cone | ☐ Concentric Reducer |
| ☐ Check Valve | ☐ Hose Valves with Cap and Chain |
| ☐ Discharge TEE | ☐ Ball Drip Valve |
- Isolating Valve**
- ☐ OS&Y Gate Valve ☐ Butterfly Valve

If Flow and pressure is not known; please send the brief description of application (hazard).

Pump location, connection system (hydrant, sprinkler.. Etc), as well as the maximum height to generate and recommend the suitable pump for the application

In line with our policy of continuous product improvement, SFFECO reserves the right to modify specifications without prior notice.

NOTES

[illegible]

SFFECO HAS A LONG STANDING ESTABLISHED REPUTATION FOR PIONEERING INNOVATION EVER SINCE ITS FOUNDATION IN 1983.

SFFECO HAS ITS STATE-OF-THE-ART MANUFACTURING PLANTS IN RIYADH AND DUBAI PRODUCING END-TO-END RANGE OF PRODUCTS FOR THE FIRE FIGHTING INDUSTRY MATCHING INTERNATIONAL STANDARDS IN QUALITY.



شركة المصنع السعودي لأجهزة الإطفاء SAUDI FACTORY FOR FIRE EQUIPMENT Co.

FACTORY & HEAD OFFICE - RIYADH

2nd Industrial Area, Al-Kharj Road, Riyadh, KSA, P.O. Box: 58469, Riyadh 11515
Tel : +966 11 2650070, E-mail: riyadh@sffeco.com.sa

SFFECO GLOBAL - DUBAI

P.O. Box: 261318, JAFZA South, Dubai U.A.E.
Tel: +971 4 880 9890, E-mail: sales@sffecoglobal.com

JEDDAH BRANCH

P.O. Box: 16769, Jeddah – 21474, KSA
Tel : +966 12 670 6009,
E-mail: jeddah@sffeco.com.sa

DAMMAM BRANCH

P.O. Box: 7162, Dammam – 31462, KSA
Tel : +966 13 8351961,
E-mail: dammam@sffeco.com.sa

MADINAH BRANCH

Tel : 0148660959, 0148283256,
E-mail: madinah@sffeco.com.sa

